

# Absolute encoders – singleturn

<b>Standard optical</b>	<b>Sendix F5858 / F5878 (shaft / hollow shaft)</b>	<b>EtherNet/IP</b>
-------------------------	--	--------------------



### New generation - ready for the future.

The optical absolute singleturn and multiturn Sendix F58 EtherNet/IP encoders are based on the latest CIP version v3.32 and EtherNet/IP version v1.30.

Key features are neighborhood detection, gear factor, the calculation of acceleration and simultaneous connection to up to 5 controllers. Thanks to the new framework, the functionality can be extended at any time via the integrated web server by update.



**EtherNet/IP™**



Safety-Lock™



High rotational speed



Temperature range  
-40°...+80°C



High protection level  
IP67



High shaft load capacity



Shock / vibration resistant



Magnetic field proof



Reverse polarity protection



Optical sensor

### Features

- Scaling of the total resolution via the gear factor.
- High resolution: singleturn up to 19 bit.
- High-precision setting of velocity and acceleration values through filter and hysteresis.
- Device Level Ring (DLR) ring redundancy of the network with two network ports.
- Low RPI time of minimum 1 ms - this makes the encoder usable for time-critical applications up to 1000 Hz update frequency.

### Benefits

- Direct mapping of pitch ratios, e.g. for gear ratios or gear reductions.
- Precise position detection.
- Cost and time savings when setting up the control system.
- Communication is maintained when the ring structure is interrupted.

# Absolute encoders – singleturn

<b>Standard optical</b>	<b>Sendix F5858 / F5878 (shaft / hollow shaft)</b>	<b>EtherNet/IP</b>
-------------------------	--	--------------------

<b>Order code</b>	<b>8.F5858</b>	<b>.XXAN.</b>	<b>A3</b>	<b>22</b>
<b>Shaft version</b>	Type	<div style="display: flex; justify-content: space-around; font-size: 0.8em;"> <span>a</span><span>b</span><span>c</span><span>d</span> </div>	<div style="display: flex; justify-content: space-around; font-size: 0.8em;"> <span>e</span> </div>	

**a Flange**

- 1 = clamping flange, IP65 ø 58 mm [2.28"]
- 3 = clamping flange, IP67 ø 58 mm [2.28"]
- 2 = synchro flange, IP65 ø 58 mm [2.28"]
- 4 = synchro flange, IP67 ø 58 mm [2.28"]
- 5 = square flange, IP65 □ 63.5 mm [2.5"]
- 7 = square flange, IP67 □ 63.5 mm [2.5"]

**b Shaft (ø x L), with flat**

- 1 = 6 x 10 mm [0.24 x 0.39"]
- 2 = 10 x 20 mm [0.39 x 0.79"]
- 3 = 1/4" x 7/8"
- 4 = 3/8" x 7/8"

**c Interface / Supply voltage**

A = EtherNet/IP / 10 ... 30 V DC

**d Type of connection**

N = 3 x axial M12 connector, 4-pin

**e Fieldbus profile**

A3= EtherNet/IP

*Options – Standard types (available from 1 piece)*

**V2A**  
DIN 1.4305  
AISI 303

Surface protection salt spray tested with clamping flange IP67 and shaft ø 10 mm:  
8.F5858.32AN.A322-**C**

**V4A**  
DIN 1.4404  
AISI 316L

Stainless steel V2A <sup>1)</sup>  
Order expansion:  
8.F5858.XXAN.A322-**V2A**

Stainless steel V4A <sup>1)</sup>  
Order expansion:  
8.F5858.XXAN.A322-**V4A**

*Options – on request (for other flange/shaft combinations)*

- Surface protection salt spray tested
- Stainless steel V2A
- Stainless steel V4A

<b>Order code</b>	<b>8.F5878</b>	<b>.XXAN.</b>	<b>A3</b>	<b>22</b>
<b>Hollow shaft</b>	Type	<div style="display: flex; justify-content: space-around; font-size: 0.8em;"> <span>a</span><span>b</span><span>c</span><span>d</span> </div>	<div style="display: flex; justify-content: space-around; font-size: 0.8em;"> <span>e</span> </div>	

**a Flange**

- 1 = with spring element long, IP65
- 2 = with spring element long, IP67
- 3 = with stator coupling, IP65 ø 65 mm [2.56"]
- 4 = with stator coupling, IP67 ø 65 mm [2.56"]
- 5 = with stator coupling, IP65 ø 63 mm [2.48"]
- 6 = with stator coupling, IP67 ø 63 mm [2.48"]
- 9 = with torque stop, flexible, IP65
- J = with torque stop, flexible, IP67

**b Blind hollow shaft (insertion depth max. 30 mm [1.18"])**

- A = ø 10 mm [0.39"]
- B = ø 12 mm [0.47"]
- C = ø 14 mm [0.55"]
- D = ø 15 mm [0.59"]
- E = ø 3/8"
- F = ø 1/2"

**c Interface / Supply voltage**

A = EtherNet/IP / 10 ... 30 V DC

**d Type of connection**

N = 3 x axial M12 connector, 4-pin

**e Fieldbus profile**

A3= EtherNet/IP

*Options – Standard types (available from 1 piece)*

**V2A**  
DIN 1.4305  
AISI 303

Stainless steel V2A <sup>2)</sup>  
Order expansion:  
8.F5878.2XAN.A322-**V2A**

**V4A**  
DIN 1.4404  
AISI 316L


Stainless steel V4A <sup>2)</sup>  
Order expansion:  
8.F5878.2XAN.A322-**V4A**

*Options – on request (for other flange/hollow shaft combinations)*

- Surface protection salt spray tested
- Stainless steel V2A
- Stainless steel V4A

1) Only in conjunction with flange **a** = 3 or 4 and shaft **b** = 1 or 2.  
 2) Only in conjunction with flange **a** = 2 and hollow shaft **b** = B or D.

# Absolute encoders – singleturn

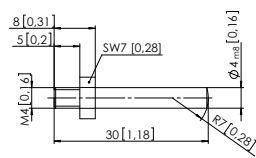Standard optical		Sendix F5858 / F5878 (shaft / hollow shaft)	EtherNet/IP
<b>Mounting accessory for shaft encoders</b>			Order no.
<b>Coupling</b>	bellows coupling ø 19 mm [0.75"] for shaft 6 mm [0.24"]		<b>8.0000.1102.0606</b>
	bellows coupling ø 19 mm [0.75"] for shaft 10 mm [0.39"]		<b>8.0000.1102.1010</b>
<b>Mounting accessory for hollow shaft encoders</b> Dimensions in mm [inch]			Order no.
<b>Torque pin, ø 4 mm</b> for flange with spring element (flange type 1)	with fixing thread		<b>8.0010.4700.0000</b>
			
<b>Cables and connectors</b>			Order no.
<b>Preassembled cables</b>	M12 male connector with external thread, 4-pin, D coded, straight single-ended 2 m [6.56'] PUR cable	port 1 + port 2	<b>05.00.6031.4411.002M</b>
	M12 male connector with external thread, 4-pin, D coded, right-angle single-ended 2 m [6.56'] PUR cable	port 1 + port 2	<b>05.00.6031.4511.002M</b>
	M12 female connector with coupling nut, 4-pin, A coded, straight single-ended 2 m [6.56'] PUR cable	power supply	<b>05.00.6061.6211.002M</b>
	M12 female connector with coupling nut, 4-pin, A coded, right-angle single-ended 2 m [6.56'] PUR cable	power supply	<b>05.00.6061.6311.002M</b>
<b>Connectors</b>	M12 male connector with external thread, 4-pin, D coded, straight (metal)	port 1 + port 2	<b>05.WASCSY4S</b>
	M12 male connector with external thread, 4-pin, D coded, right-angle (metal)	port 1 + port 2	<b>8.0000.5128.0000</b>
	M12 female connector with coupling nut, 4-pin, A coded, straight (plastic)	power supply	<b>05.B8141-0</b>
	M12 female connector with coupling nut, 4-pin, A coded, right-angle (plastic)	power supply	<b>05.B8241-0</b>

Further Kübler accessories can be found at: [kuebler.com/accessories](http://kuebler.com/accessories)

Further Kübler cables and connectors can be found at: [kuebler.com/connection-technology](http://kuebler.com/connection-technology)

# Absolute encoders – singleturn

<b>Standard optical</b>	<b>Sendix F5858 / F5878 (shaft / hollow shaft)</b>	<b>EtherNet/IP</b>
-------------------------	--	--------------------

## Technical data

Mechanical characteristics	
<b>Max. speed</b>	9000 min <sup>-1</sup> (short-term – 10 min) 6000 min <sup>-1</sup> (continuous)
<b>Starting torque at 20 °C [68 °F]</b>	< 0.01 Nm
<b>Moment of inertia</b>	shaft version 3.0 x 10 <sup>-6</sup> kgm <sup>2</sup> blind hollow shaft version 4.0 x 10 <sup>-6</sup> kgm <sup>2</sup>
<b>Load capacity of shaft</b>	radial 80 N axial 40 N
<b>Weight</b>	approx. 0.45 kg [15.87 oz]
<b>Protection acc. to EN 60529</b>	IP65, IP67
<b>Working temperature range</b>	-40 °C ... +80 °C [-40 °F ... +176 °F]
<b>Material</b>	Standard V2A V4A DIN 1.4305 DIN 1.4404 AISI 303 AISI 316L shaft/hollow shaft V2A V2A V4A flange aluminum V2A V4A housing aluminum V2A V4A
<b>Shock resistance acc. EN 60068-2-27</b>	2500 m/s <sup>2</sup> , 6 ms
<b>Vibration resistance acc. EN 60068-2-6</b>	100 m/s <sup>2</sup> , 55 ... 2000 Hz

Electrical characteristics	
<b>Supply voltage</b>	10 ... 30 V DC
<b>Power consumption (no load)</b>	max. 250 mA
<b>Reverse polarity protection of the supply voltage (+V)</b>	yes

Approvals	
<b>UL compliant</b> in accordance with	File no. E224618
<b>CE compliant</b> in accordance with	EMC Directive 2014/30/EU RoHS Directive 2011/65/EU

## Interface characteristics EtherNet/IP

General information	
<b>EtherNet/IP conformance tested acc. to</b>	version CT-12 of 11. Dez. 2014
<b>EtherNet/IP specification</b>	Vol 2, Ed 1.17
<b>CIP specification</b>	Vol 1, Ed 3.16
<b>Protocol</b>	F58x8 Standards & Features CIP Version v3.32 Ethernet/IP Version v1.30 LLDP BOOTP DHCP Device Profile Encoder Device

Adjustable parameters	
<ul style="list-style-type: none"> <li>• Preset</li> <li>• Count direction</li> <li>• Resolution</li> <li>• Unity of speed</li> <li>• IP address</li> <li>• Number of revolutions</li> <li>• Position</li> <li>• Position format</li> <li>• Position limit</li> </ul>	<ul style="list-style-type: none"> <li>• Acceleration unit</li> <li>• Speed limit</li> <li>• Acceleration limit</li> <li>• Scaling</li> <li>• Gear factor</li> <li>• Filter for speed and acceleration</li> <li>• Hysteresis for speed and acceleration</li> </ul>

Resolution	
<b>Resolution singleturn (MUR)</b>	scalable 1 ... 524 288 (19 bit) default 262 144 (18 bit)

Objects (CIP Objects)	
<ul style="list-style-type: none"> <li>• Identity Object</li> <li>• Message Router</li> <li>• Assembly Object</li> <li>• Connection Manager</li> <li>• Position Sensor Object</li> </ul>	<ul style="list-style-type: none"> <li>• Qos Object</li> <li>• Port Object</li> <li>• TCP / IP Interface Object</li> <li>• EtherNet Link Object</li> </ul>




EtherNet/IP features	
<ul style="list-style-type: none"> <li>• DLR (Device Level Ring) possible</li> <li>• Qos (Quality of Service) possible</li> <li>• ACD (Address Conflict Detection)</li> </ul>	<ul style="list-style-type: none"> <li>• Multicast and unicast capability</li> <li>• Up to 5 PLC connections</li> </ul>

Process data	
<ul style="list-style-type: none"> <li>• Position</li> <li>• Speed data</li> <li>• Acceleration</li> <li>• Errors</li> <li>• Alarms</li> </ul>	<ul style="list-style-type: none"> <li>• Warnings</li> <li>• Offset (for preset)</li> <li>• Battery voltage</li> <li>• Operating voltage</li> <li>• Temperature</li> </ul>

# Absolute encoders – singleturn


<b>Standard optical</b>	<b>Sendix F5858 / F5878 (shaft / hollow shaft)</b>	<b>EtherNet/IP</b>
-------------------------	--	--------------------

## Terminal assignment bus

Interface	Type of connection	Function	M12 connector, 4-pin					
A	N (3 x M12 connector)	Bus Port 1	Signal:	Transmit data+	Receive data+	Transmit data -	Receive data -	 <span style="float: right;">D coded</span>
			Abbreviation:	TxD+	RxD+	TxD-	RxD-	
			Pin:	1	2	3	4	
		Power supply	Signal:	Voltage +	–	Voltage –	–	
			Abbreviation:	+ V	–	0 V	–	
			Pin:	1	2	3	4	
		Bus Port 2	Signal:	Transmit data+	Receive data+	Transmit data -	Receive data -	 <span style="float: right;">D coded</span>
			Abbreviation:	TxD+	RxD+	TxD-	RxD-	
			Pin:	1	2	3	4	

## Rear side connections and display elements

①	Ethernet Port – Link 2	
②	Supply voltage	
③	Cover screw	
④	Ethernet Port – Link 1	
⑤	Link 2	flashes yellow when connected
⑥	BF – Bus Failure	displays network errors *)
⑦	SF – System Failure	displays system errors *)
⑧	ENC	Shows status of encoder *)
⑨	Link 1	flashes yellow when connected
⑩	Switch: x 100	
⑪	Switch: x 10	
⑫	Switch: x 1	

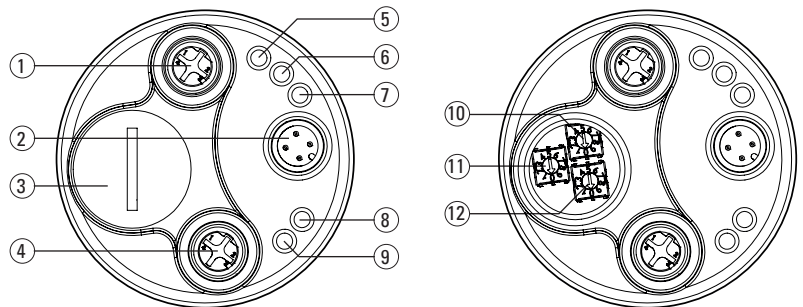

\*) see manual

## Settings rotary switch

Switch position	Meaning
000	Address assignment via DHCP
1 ... 254	Use stored subnet (standard: 192.168.1.x, mask: 255.255.255.0) The last digit „x“ of the IP address is determined by the rotary switch.
300	Explicit Protection Mode OFF
555	Resetting the encoder to factory setting. To reset, this switch position must be set. If necessary, switch off the operating voltage and switch it on again within 10 seconds. After that, the encoder can be switched off and the switch setting desired during operation can be made. All parameters are now set to factory settings - both the encoder objects and the TCP/IP settings.
800	Explicit Protection Mode ON
Other positions	Reserved, do not use!

# Absolute encoders – singleturn

**Standard optical**

**Sendix F5858 / F5878 (shaft / hollow shaft)**

**EtherNet/IP**



## Dimensions shaft version

Dimensions in mm [inch]

### Clamping flange, $\varnothing$ 58 [2.28]

Flange type 1 + 3

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.31] deep


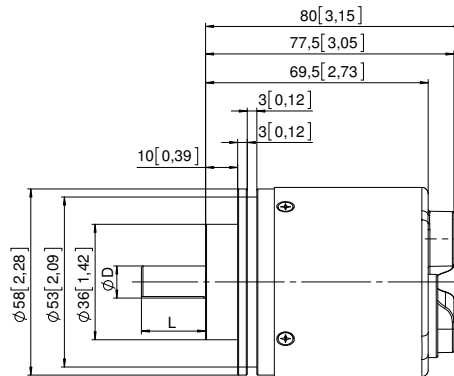


D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

### Synchro flange, $\varnothing$ 58 [2.28]

Flange type 2 + 4



- 1 3 x M3, 6 [0.24] deep

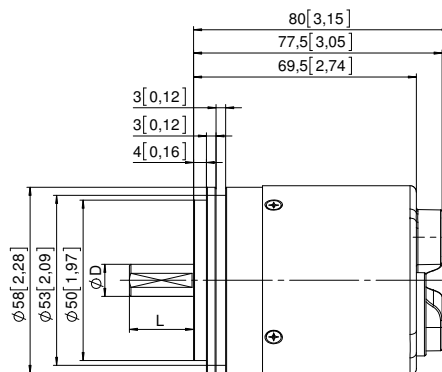

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

### Square flange, $\square$ 63.5 [2.5]

Flange type 5 + 7

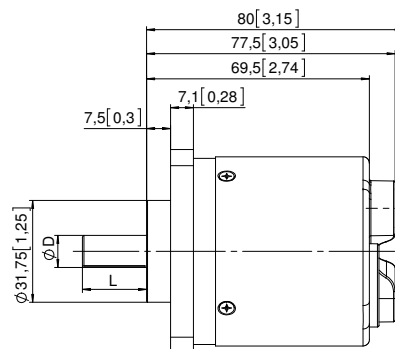

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

# Absolute encoders – singleturn

<b>Standard optical</b>	<b>Sendix F5858 / F5878 (shaft / hollow shaft)</b>	<b>EtherNet/IP</b>
-------------------------	--	--------------------

## Dimensions hollow shaft version


Dimensions in mm [inch]

### Flange with spring element, long Flange type 1 + 2

- 1 Slot spring element, recommendation: torque pin DIN 7,  $\varnothing$  4 [0.16]
- 2 3 x M3, 5.5 [0.22] deep
- 3 Recommended torque for the clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

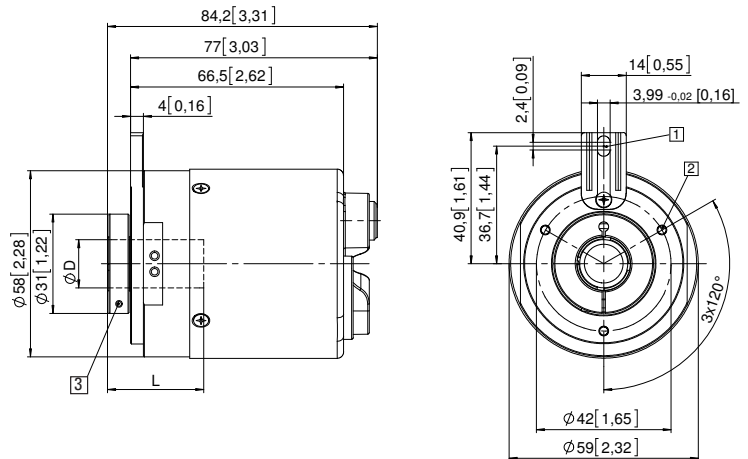


### Flange with stator coupling, $\varnothing$ 65 [2.56] Flange type 3 + 4

- 1 Recommended torque for the clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

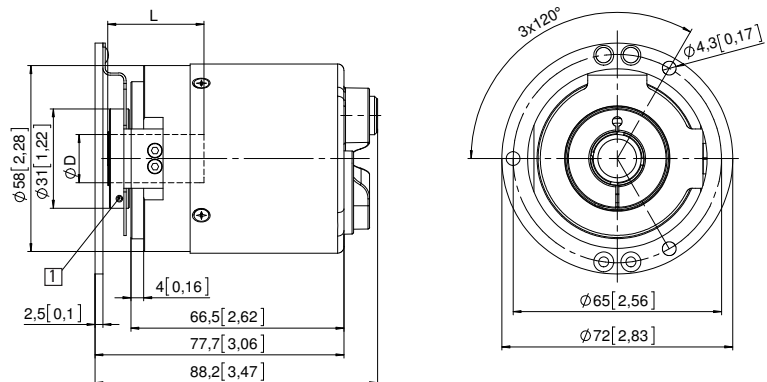

### Flange with stator coupling, $\varnothing$ 63 [2.48] Flange type 5 + 6

- 1 Recommended torque for the clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

