



MEGAFLAT



MEGADYNE

Introduction to Megaflat

3

Polyurethane flat belts


Product range

4

Rubber flat belts

Product range

8



INTRODUCTION TO MEGAFLAT



MEGAFLAT belts are truly endless mandrel moulded without a single seam or splice. Special fabrics of Polyester, Polyamid, Aramide, Cotton yarn or Elastic yarn are manufactured in endless form on the most modern CNC knitting machines. The available coatings Polyurethane, Silicone and Natural Rubber are applied as an endless cover. This wide variety of basic materials and surface treatments guarantee the perfect belt for transmission and for conveying even at extreme speeds and in special environments.

MAIN FEATURES

- High flexibility
- Small pulley diameters
- Dimensional accuracy
- High speed
- Energy efficient
- Low noise and vibration
- Low maintenance
- Good chemical and ozone resistance
- High friction surface
- Uniform elongation values

MEGAFLAT is always a belt made exactly to customer requirements in endless form.



MAIN COMPONENTS OF MEGAFLAT BELTS

- **TENSILE REINFORCEMENT:**
Special fabrics are available with:
Elastic yarn, high elastic elongation from 4-10% for fixed shaft centre distances.
Polyamide, medium elastic from 0,5-1,5% for fixed shaft centre distances.
Polyester, low elastic elongation.
Cotton yarn, low elongation and low coefficient of friction.
Aramide, extremely low elongation and temperature resistance up to 280°.
- **COATINGS:**
Endless covers are available
Foamed Polyurethane, in colours yellow, grey, red and white, different hardness and thickness up to 10 mm, good coefficient of friction to paper
Neoprene Rubber, black with hardness approx. 75 Shore A, high resistance to abrasion, high coefficient of friction, rough on transport side and smooth on the reverse side
Silicones, in colours white, grey, red, blue, hardness approx. 30-35 ShA. High temperature resistant, FDA approved.





POLYURETHANE FLAT BELTS

PRODUCT RANGE

TYPE	P0	P102
		
Fabric	No fabric	Elastic fabric
Coating for drive or transport side	Standard: 50 ShA (+/-7) Special: 30-40 ShA (soft foam), 60-75 ShA (hard)	Standard: 50 ShA (+/-7) Special: 30-40 ShA (soft foam), 60-75 ShA (hard)
Coating revers side	No	Polyurethane/Silicone
Colour ⁽¹⁾	Yellow & Grey	Yellow & Grey
Antistatic	No	Possible
Coefficient of friction (μ)		
• Coated side smooth	0,4	0,4
• Fabric side rough	-	0,2
Breaking strength (N) per cm width in endless form	140	250
Pretension (N) recommended per cm width in endless form	-	10
Elongation (%) at pretension recommended per cm	4 - 8	4
Minimum recommended pulley diameter (mm)	8	25
Size (mm) ⁽²⁾		
• Length	210 - 2500	210 - 2500
• Width (length \leq 460 mm)	6 - 330	6 - 330
• Width (length > 460 - 600 mm)	6 - 330	6 - 330
• Width (length > 600 - 750 mm)	6 - 550	6 - 600
• Width (length > 750 mm)	6 - 550	6 - 600
• Thickness	0,9	1,8 ⁽³⁾
Tolerances		
• Length (%)	+/-2,0	+/-2,0
• Width (mm)	+/-0,50	+/-0,50
• Thickness (mm)	+/-0,05	+/-0,05
Working temperature (intermittent)	-10°C / +60°C (+80)	-10°C / +60°C (+80)
Applications	Suitable for fixed center distance drive system like copying machines. Highly elastic.	Suitable for fixed center distance drive systems like machinery for paper transport. Elastic.

POLYURETHANE FLAT BELTS

PRODUCT RANGE


TYPE	P108	P110
		
Fabric	Polyester/Cotton	Polyester
Coating for drive or transport side	Standard: 50 ShA (+/-7) Special: 30-40 ShA (soft foam), 60-75 ShA (hard)	Standard: 50 ShA (+/-7) Special: 30-40 ShA (soft foam), 60-75 ShA (hard)
Coating revers side	Polyurethane/Silicone	Polyurethane/Silicone
Colour ⁽¹⁾	Yellow & Grey	Yellow & Grey
Antistatic	Possible	Possible
Coefficient of friction (μ)		
• Coated side smooth	0,4	0,4
• Fabric side rough	0,1	0,3
Breaking strength (N) per cm width in endless form	900	1250
Pretension (N) recommended per cm width in endless form	200	150
Elongation (%) at pretension recommended per cm	1,2	0,8
Minimum recommended pulley diameter (mm)	8	12
Size (mm) ⁽²⁾		
• Length	210 - 3850	210 - 3850
• Width (length <= 460 mm)	6 - 330	6 - 330
• Width (length > 460 - 600 mm)	6 - 330	6 - 330
• Width (length > 600 - 750 mm)	6 - 600	6 - 600
• Width (length > 750 mm)	6 - 600	6 - 600
• Thickness	0,8 ⁽³⁾	1,0 ⁽³⁾
Tolerances		
• Length (%)	+/-0,50	+/-0,50
• Width (mm)	+/-0,50	+/-0,50
• Thickness (mm)	+/-0,05	+/-0,05
Working temperature (intermittent)	-10°C / +60°C (+80)	-10°C / +60°C (+80)
Applications	Suitable for knife edge transport. Low coefficient of friction on textile side. Thin, highly flexible band.	Suitable for flexible drive and transport systems like grinding machines. Very good running performance. Universal applications.

⁽¹⁾Additional colours on request - ⁽²⁾Additional dimensions on request

⁽³⁾Increase of thickness by about 0,3/0,5 mm for belts coated both sides

POLYURETHANE FLAT BELTS

PRODUCT RANGE

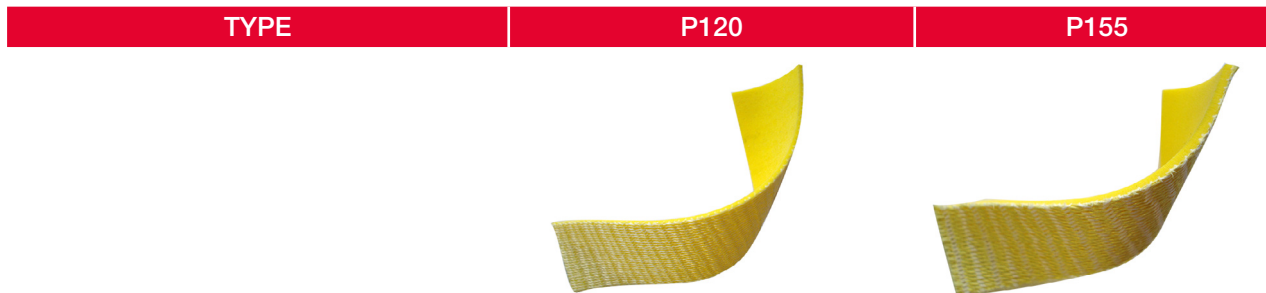

Fabric	Polyester	Aramid/ Polyester
Coating for drive or transport side	Standard: 50 ShA (+/-7) Special: 30-40 ShA (soft foam), 60-75 ShA (hard)	Standard: 50 ShA (+/-7) Special: 30-40 ShA (soft foam), 60-75 ShA (hard)
Coating revers side	Polyurethane/Silicone	Polyurethane/Silicone
Colour ⁽¹⁾	Yellow & Grey	Yellow & Grey
Antistatic	Possible	Possible

Coefficient of friction (μ)		
• Coated side smooth	0,4	0,4
• Fabric side rough	0,2	0,2

Breaking strength (N) per cm width in endless form	3500	6500
Pretension (N) recommended per cm width in endless form	300	350
Elongation (%) at pretension recommended per cm	0,8	0,5
Minimum recommended pulley diameter (mm)	20	30





Size (mm) ⁽²⁾		
• Length	210 - 4300	210 - 4300
• Width (length \leq 460 mm)	6 - 330	6 - 330
• Width (length > 460 - 600 mm)	6 - 330	6 - 330
• Width (length > 600 - 750 mm)	6 - 600	6 - 600
• Width (length > 750 mm)	6 - 600	6 - 600
• Thickness	1,5 ⁽³⁾	2,0 ⁽³⁾

Tolerances		
• Length (%)	+/-0,50	+/-1,0
• Width (mm)	+/-0,50	+/-0,50
• Thickness (mm)	+/-0,05	+/-0,05

Working temperature (intermittent)	-10°C / +60°C (+80)	-10°C / +60°C (+80)
Applications	Suitable for heavy drive conditions. Universal applications. Medium-duty drives.	Suitable for conveyor system. Extremely low elongation. Heavy-duty drives.

POLYURETHANE FLAT BELTS

PRODUCT RANGE

S108	S110	S120	S155
			
Polyester/Cotton	Polyester	Polyester	Aramid/Polyester
Silicone 30-35 ShA	Silicone 30-35 ShA	Silicone 30-35 ShA	Silicone 30-35 ShA
Polyurethane/Silicone	Polyurethane/Silicone	Polyurethane/Silicone	Polyurethane/Silicone
White & Grey	White & Grey	White & Grey	White & Grey
Possible	Possible	Possible	Possible
0,6	0,6	0,6	0,6
0,1	0,2	0,4	0,2
800	1000	3400	5900
180	125	350	400
0,8	0,8	0,8	0,5
8	12	20	25
210 - 3850	210 - 3850	210 - 4300	210 - 3800
6 - 330	6 - 330	6 - 330	6 - 330
6 - 330	6 - 330	6 - 330	6 - 330
6 - 600	6 - 600	6 - 600	6 - 600
6 - 600	6 - 600	6 - 600	6 - 600
0,8 ⁽³⁾	1,0 ⁽³⁾	1,5 ⁽³⁾	2,0 ⁽³⁾
+/-0,50	+/-0,50	+/-0,50	+/-1,0
+/-0,50	+/-0,50	+/-0,50	+/-0,50
+/-0,05	+/-0,05	+/-0,05	+/-0,05
-50°C / +120°C (+160)	-50°C / +150°C (+180)	-50°C / +150°C (+180)	-60°C / +280°C (+300)
Transport belt, heat and cold resistant. Knife edge transport. Food contact.	Transport belt, heat and cold resistant. Suitable for food transport.	Universal transport belt, also for drive applications.	Transport belt, high strength and high temperature extremes.

⁽¹⁾Additional colours on request - ⁽²⁾Additional dimensions on request

⁽³⁾Increase of thickness by about 0,3/0,5 mm for belts coated both sides

RUBBER FLAT BELTS

PRODUCT RANGE



Fabric	Polyester	Polyester/Cotton	Polyester
Coating for drive or transport side	Neoprene rough	Neoprene rough	Neoprene rough
Coating revers side	Neoprene smooth	Neoprene smooth	Neoprene smooth
Colour ⁽¹⁾	Black	Black	Black
Antistatic	Yes	Yes	Yes

Coefficient of friction (μ)			
• Coated side smooth	0,6	0,6	0,6
• Fabric side rough	0,5	0,5	0,5

Breaking strength (N) per cm width in endless form	1500	950	1750
Pretension (N) recommended per cm width in endless form	150	260	270
Elongation (%) at pretension recommended per cm	0,8	0,8	0,8
Minimum recommended pulley external diameter (mm)	6	10	15

Size (mm) ⁽²⁾			
• Length	200 - 3850	200 - 3850	200 - 3850
• Width (length < 470 mm)	6 - 330	6 - 330	6 - 300
• Width (length \geq 470 - 600 mm)	6 - 430	6 - 430	6 - 430
• Width (length > 600 - 750 mm)	6 - 430	6 - 430	6 - 430
• Width (length > 750 mm)	6 - 430	6 - 430	6 - 430
• Thickness	0,5	0,65	0,9

Tolerances			
• Length (%) *($\leq 600\text{ mm}$: $\pm 5\text{mm}$)	$\pm 0,50$	$\pm 0,50$	$\pm 0,50$
• Width (mm) for cut belt	$\pm 0,50$	$\pm 0,50$	$\pm 0,50$
• Thickness (mm)	$\pm 0,15$	$\pm 0,15$	$\pm 0,15$

Working temperature	-30°C / +110°C	-25°C / +100°C	-25°C / +100°C
Applications	Suitable for light-load transmission or conveying. Drivers for office equipments.	Particularly suitable for applications in office equipment. Very flexible.	Suitable for universal applications and textile machines. High belt running speed.



RUBBER FLAT BELTS

PRODUCT RANGE



T120	T150	T155	T200
Polyester	Polyester	Aramid/ Polyester	Polyester
Neoprene rough	Neoprene rough	Neoprene rough	Neoprene rough
Neoprene smooth	Neoprene smooth	Neoprene smooth	Neoprene smooth
Black	Black	Black	Black
Yes	Yes	Yes	Yes

0,6	0,6	0,6	0,6
0,5	0,5	0,5	0,5

3450	3000	8000	4000
350	300	500	400
0,8	0,7	0,3	0,8
20	15	30	20

470- 3850	200 - 3850	470 - 3850	200 - 3850
6 - 330	6 - 330	6 - 330	6 - 330
6 - 430	6 - 430	6 - 430	6 - 430
6 - 430	6 - 430	6 - 430	6 - 430
6 - 430	6 - 430	6 - 430	6 - 430
1,4	0,9	1,6	1,1

+/-*0,5	+/-*0,5	+/-1,00	+/-*0,50
+/-0,50	+/-0,50	+/-0,50	+/-0,50
+/-0,15	+/-0,15	+/-0,15	+/-0,15

-25°C / +100°C	-25°C / +100°C	-25°C / +100°C	-30°C / +110°C
Suitable for medium-duty drives for wood or metal working.	Suitable for textile machinery. High belt running speed and medium torque drive	Suitable for low stretch demanding drive conditions. Heavy-duty drives.	Suitable for high torque, high speed drives such as machine tools.

⁽¹⁾Additional colours on request - ⁽²⁾Additional dimensions on request

The data and information contained in the present catalogue are updated to the date of the catalogue's printing. Ammega Italia S.p.A. reserves the right to modify the specifications, performances and other information relating to the belts described in the present catalogue, at any time at its own discretion, without any prior notice.

For updating refer to our website www.megadynegroup.com.

Technical specifications, performances and other information provided in the present catalogue are indicative and do not bound Ammega Italia S.p.A. unless such specifications, performances or other information are expressly agreed in the agreement with the customer.

We also recommend to read carefully the following documents on our web site www.megadynegroup.com:

- Ammega Italia S.p.A. General Conditions of Sale (comprising the warranty)
- Theoretical Belt Life
- Drive Components: Storage, Installation, Maintenance and Troubleshooting Handbook
- Belts standard use condition and temperature.

Copyright Notice: Ammega Italia S.p.A. copyright. All rights reserved.

Ammega Italia S.p.A. is and shall remain the owner of all rights on drawings, technical specifications and any other information contained in the present catalogue or otherwise communicated by Ammega Italia S.p.A. to the customer. The customer shall not disclose such information to third parties or use such information for purposes different from the definition of the order to Ammega Italia S.p.A., unless upon prior written authorization of Ammega Italia S.p.A.

AUSTRALIA**Victoria**

Phone +61 (03) 8780 6030
 au-ptsales@ammega.com

BRASIL**Sorocaba**

Phone +55 15 2101 7700
 Info.br@megadynegroup.com

CANADA**Edmonton**

Phone +1 780 461 4400
 Info.ca@megadynegroup.com

Montreal

Phone +1 514 695 1313
 Info.ca@megadynegroup.com

Toronto

Phone +1 905 602 4400
 Info.ca@megadynegroup.com

CHINA**Foshan**

Phone +86 757 8381 5530
 info.cn@megadynegroup.com

Ningbo*

Phone +86 574 8650 5008
 info.cn@megadynegroup.com

Phone +86 574 8833 4378
 sales@challengept.com

Qingdao*

Phone +86 532 8658 0951
 info.cn@megadynegroup.com

Shanghai

Phone +86 21 5447 1473
 info.cn@megadynegroup.com

COLOMBIA**Bogotá**

Phone + 57 601 390 4325
 Info.co@megadynegroup.com

Cartagena

Phone + 57 605 693 2591
 Info.co@megadynegroup.com

Mosquera – Cundinamarca

Phone +57 601 893 9890
 info.co@megadynegroup.com

Cali

Phone +57 602 387 5945
 info.co@megadynegroup.com

CZECH REPUBLIC**Prague**

Phone +420 603 461 892
 Info.cz@megadynegroup.com

FRANCE**Paris**

Phone +33 1 6079 8200
 info.fr@megadynegroup.com

GERMANY**Borchen**

Phone +49 5251 8735 0
 info.de@megadynegroup.com

HUNGARY**Budapest**

Phone +36 23 428 628
 info.hu@megadynegroup.com

INDIA**Chennai***

Phone +91 98841 81175
 info.in@megadynegroup.com

IRELAND**Dublin**

Phone +353 1 456 6311
 ireland@challengept.com

ISRAEL**Caesarea**

Phone +972 4 637 1485
 info.il@megadynegroup.com

ITALY**Turin***

Phone +39 011 926 8052
 info@megadynegroup.com

Pescara*

Phone +39 085 9700547
 info.it@megadynegroup.com

Venice

Phone +39 041 929 367
 info.it@megadynegroup.com

JAPAN**Nagoya**

Phone +81 52 433 7400
 info.jp@megadynegroup.com

MALAYSIA

Phone +60 380 618 849
 info.my@megadynegroup.com

MEXICO**Mexico C.P.**

Phone +52 55 5587 3680
 info.mx@megadynegroup.com

PERU**Lima**

Phone + 51 1 713 0069
 info.pe@megadynegroup.com

POLAND**Bielsko Biala**

Phone + 48 32 447 7179
 info.pl@megadynegroup.com

Bydgoszcz*

info.pl@megadynegroup.com

SINGAPORE**Singapore**

Phone +65 62739767
 Info.sg@megadynegroup.com

SOUTH AFRICA**Johannesburg**

Phone + 27 (0) 12 661 1652
 info.za@megadynegroup.com

Phone + 27 (0) 11 3976115
 sasales@challengept.com

Cape Town

Phone +27 (0)21 9820772
 info.za@megadynegroup.com

SOUTH KOREA**Gyeonggi-do**

Phone +82 314483613-7
 Info.kr@megadynegroup.com

SPAIN**Vilanova***

Phone +34 93 811 5450
 info.es@megadynegroup.com

SWEDEN**Kristianstad**

Phone +46 10 1309600
 info.se@megadynegroup.com

THAILAND**Bangkok**

Phone +66 2 902260413
 info.th@megadynegroup.com

TURKEY**Izmir**

Phone +90 232 877 07 00
 info.tr@megadynegroup.com

U.K.**Birmingham**

Phone +44 1384 215 021
 info.uk@megadynegroup.com

Wolverhampton

Phone +44 (0) 1902 866116
 uksales@challengept.com

VIETNAM

Phone +84 28 3765 6205
 info.vn@megadynegroup.com

U.S.A**California**

Phone +1 323 265 8061
 info.us@megadynegroup.com

Florida

Phone +1 813 241 4111
 info.us@megadynegroup.com

Georgia*

info.us@megadynegroup.com

Illinois

Phone +1 630 752 0600
 info.us@megadynegroup.com

New Jersey Americas HQ

Phone +1 973 227 4904
 info.us@megadynegroup.com

North Carolina*

Phone +1 704 583 5388
 info.us@megadynegroup.com

Oregon

Phone +1 503 231 7224
 info.us@megadynegroup.com

Texas

Phone +1 972 438 6992
 info.us@megadynegroup.com

*** Manufacturing locations****GENERAL CONTACT INFORMATION****MEGADYNE**

Via S. Lucia, 114
 10075 Mathi (Torino)

Phone +39 011 926 8052
 info@megadynegroup.com

ammega.com