


STYLE 6234 COMPRESSED SHEET GASKET

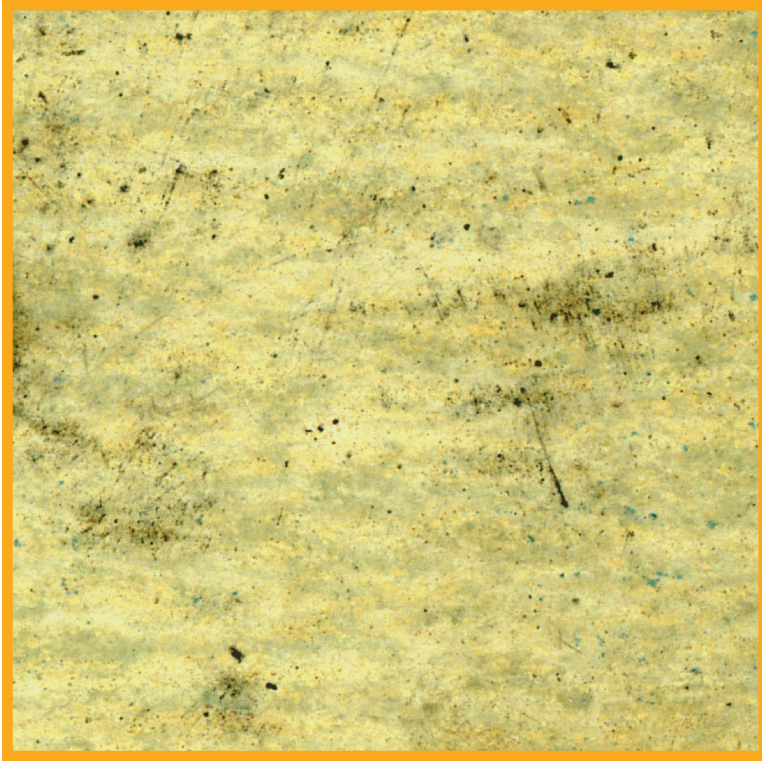

Manufactured with a special compound of heat and chemical resistant nitrile rubber and synthetic fibers, **Style 6234** is a blend of organic fibers and exhibits the highest chemical and temperature resistance of all non-asbestos compressed sheet we offer. This product withstands temperatures of 750°F and 399°C, and pressures up to 1350 psi. SEPCO® recommends the usage of mating flanges in applications sealing steam, air gases, ammonia, chemicals and many acids and caustic solutions. This product services water, steam, hydrocarbons and mild chemicals.

SPECIFICATIONS

Style: 6234 Compressed Sheet Gasket

Binder: Nitrile

Color: Off White

Pressures: 1350 psi max.

Temperatures: up to 750° F / 399° C

Sizes: 60" x 60"

Thicknesses: 1/64", 1/32", 1/16", 3/32", 1/8", 1/4"

"Since the performance of the gasket material is dependent on many other factors not related to the gasket itself, purchaser is **WARNED** that the maximum operating conditions shown in the Technical Data Chart may not be achieved under the certain conditions. Purchaser is therefore urged to test the gasket material under the actual conditions of assembly and operation to determine the appropriate maximum operating conditions."

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.

Certified to ISO 9001: 2000 Standards.

Quality Fluid Sealing Solutions for Industry.