

U.S. Tsubaki Power Transmission, LLC
 U.S. Tsubaki Holdings, Inc.
 Corporate Headquarters
 301 E. Marquardt Dr.
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500


Fax: 847.459.9515

Email: sales@ustsubaki.com

Website: www.ustsubaki.com

AL SERIES LEAF CHAIN

New applications should use BL series chain. AL series was removed from the A.N.S.I. B29.8 Leaf chain standard in 1975.

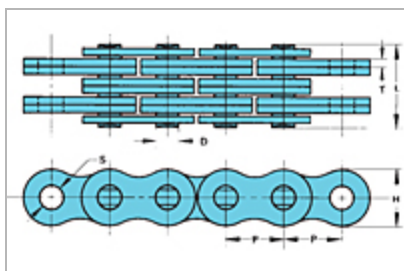

1

<u>Item #</u>	<u>P - Pitch</u>	<u>Lacing</u>	<u>Min. Tensile Strength</u>	<u>D</u>	<u>L</u>	<u>T</u>	<u>Quantity</u>
<u>AL422</u>	0.500 in	2x2	3700 lb	0.156 in	0.331 in	0.060 in	1
<u>AL444</u>	0.500 in	4x4	7500 lb	0.156 in	0.585 in	0.060 in	1
<u>AL466</u>	0.500 in	6x6	11200 lb	0.156 in	0.839 in	0.060 in	1

<u>Item #</u>	<u>P - Pitch</u>	<u>Lacing</u>	<u>Min. Tensile Strength</u>	<u>D</u>	<u>L</u>	<u>T</u>	<u>Quantity</u>
<u>AL522</u>	0.625 in	2x2	6200 lb	0.200 in	0.427 in	0.080 in	1
<u>AL544</u>	0.625 in	4x4	12300 lb	0.200 in	0.762 in	0.080 in	1
<u>AL566</u>	0.625 in	6x6	18500 lb	0.200 in	1.094 in	0.080 in	1
<u>AL622</u>	0.750 in	2x2	8600 lb	0.234 in	0.498 in	0.094 in	1
<u>AL644</u>	0.750 in	4x4	17200 lb	0.234 in	0.888 in	0.094 in	1
<u>AL666</u>	0.750 in	6x6	25800 lb	0.234 in	1.278 in	0.094 in	1
<u>AL822</u>	1.000 in	2x2	14600 lb	0.311 in	0.644 in	0.125 in	1
<u>AL844</u>	1.000 in	4x4	29100 lb	0.311 in	1.173 in	0.125 in	1
<u>AL866</u>	1.000 in	6x6	43600 lb	0.311 in	1.701 in	0.125 in	1
<u>AL1022</u>	1.250 in	2x2	22000 lb	0.373 in	0.789 in	0.156 in	1
<u>AL1044</u>	1.250 in	4x4	44000 lb	0.373 in	1.445 in	0.156 in	1

<u>Item #</u>	<u>P - Pitch</u>	<u>Lacing</u>	<u>Min. Tensile Strength</u>	<u>D</u>	<u>L</u>	<u>T</u>	<u>Quantity</u>
<u>AL1066</u>	1.250 in	6x6	66000 lb	0.373 in	2.098 in	0.156 in	1
<u>AL1222</u>	1.500 in	2x2	31700 lb	0.437 in	0.953 in	0.187 in	1
<u>AL1244</u>	1.500 in	4x4	63400 lb	0.437 in	1.732 in	0.187 in	1
<u>AL1266</u>	1.500 in	6x6	95000 lb	0.437 in	2.514 in	0.187 in	1
<u>AL1444</u>	1.750 in	4x4	83600 lb	0.500 in	2.020 in	0.219 in	1
<u>AL1466</u>	1.750 in	6x6	125400 lb	0.500 in	2.935 in	0.219 in	1
<u>AL1644</u>	2.000 in	4x4	105800 lb	0.562 in	2.285 in	0.250 in	1
<u>AL1666</u>	2.000 in	6x6	158000 lb	0.562 in	3.325 in	0.250 in	1