

U.S. Tsubaki Power Transmission, LLC  
 U.S. Tsubaki Holdings, Inc.  
 Corporate Headquarters  
 301 E. Marquardt Dr.  
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515


Email: [sales@ustsubaki.com](mailto:sales@ustsubaki.com)

Website: [www.ustsubaki.com](http://www.ustsubaki.com)

## BL SERIES LEAF CHAIN

U.S. Tsubaki BL Series Leaf Chains are available in a wide variety of options. Find your exact specifications below.

**All dimensions are nominal values and for reference only**

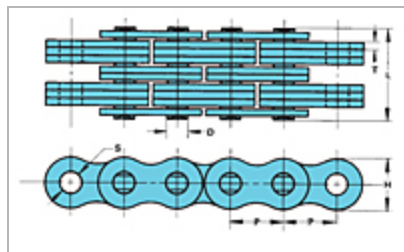

1 2

<u>Item #</u>	<u>Lacing</u>	<u>P - Pitch</u>	<u>Min. Tensile Strength</u>	<u>ASME/ANSI Min. Tensile Strength</u>	<u>D</u>	<u>L</u>	<u>Quantity</u>
<u>BL422</u>	2x2	0.500 in	5300 lb	5000 lb	0.200 in	0.427 in	1
<u>BL423</u>	2x3	0.500 in	5300 lb	5000 lb	0.200 in	0.510 in	1

<u>Item #</u>	<u>Lacing</u>	<u>P - Pitch</u>	<u>Min. Tensile Strength</u>	<u>ASME/ANSI Min. Tensile Strength</u>	<u>D</u>	<u>L</u>	<u>Quantity</u>
<u>BL434</u>	3x4	0.500 in	7900 lb	7500 lb	0.200 in	0.677 in	1
<u>BL444</u>	4x4	0.500 in	10600 lb	10000 lb	0.200 in	0.764 in	1
<u>BL446</u>	4x6	0.500 in	10600 lb	10000 lb	0.200 in	0.929 in	1
<u>BL466</u>	6x6	0.500 in	15600 lb	15000 lb	0.200 in	1.094 in	1
<u>BL522</u>	2x2	0.625 in	8800 lb	7500 lb	0.234 in	0.498 in	1
<u>BL523</u>	2x3	0.625 in	8800 lb	7500 lb	0.234 in	0.594 in	1
<u>BL534</u>	3x4	0.625 in	13200 lb	11000 lb	0.234 in	0.791 in	1
<u>BL544</u>	4x4	0.625 in	17600 lb	15000 lb	0.234 in	0.888 in	1
<u>BL546</u>	4x6	0.625 in	17600 lb	15000 lb	0.234 in	1.083 in	1
<u>BL566</u>	6x6	0.625 in	26400 lb	22500 lb	0.234 in	1.278 in	1
<u>BL622</u>	2x2	0.750 in	14300 lb	11000 lb	0.312 in	0.645 in	1

<u>Item #</u>	<u>Lacing</u>	<u>P - Pitch</u>	<u>Min. Tensile Strength</u>	<u>ASME/ANSI Min. Tensile Strength</u>	<u>D</u>	<u>L</u>	<u>Quantity</u>
<u>BL623</u>	2x3	0.750 in	14300 lb	11000 lb	0.312 in	0.778 in	1
<u>BL634</u>	3x4	0.750 in	21500 lb	17000 lb	0.312 in	1.041 in	1
<u>BL644</u>	4x4	0.750 in	28500 lb	22000 lb	0.312 in	1.173 in	1
<u>BL646</u>	4x6	0.750 in	28500 lb	22000 lb	0.312 in	1.437 in	1
<u>BL666</u>	6x6	0.750 in	43000 lb	33000 lb	0.312 in	1.701 in	1
<u>BL822</u>	2x2	1.000 in	23100 lb	19000 lb	0.375 in	0.794 in	1
<u>BL823</u>	2x3	1.000 in	23100 lb	19000 lb	0.375 in	0.953 in	1
<u>BL834</u>	3x4	1.000 in	34800 lb	29000 lb	0.375 in	1.281 in	1
<u>BL844</u>	4x4	1.000 in	46200 lb	38000 lb	0.375 in	1.453 in	1
<u>BL846</u>	4x6	1.000 in	46200 lb	38000 lb	0.375 in	1.772 in	1
<u>BL866</u>	6x6	1.000 in	69500 lb	57000 lb	0.375 in	2.098 in	1

<u>Item #</u>	<u>Lacing</u>	<u>P - Pitch</u>	<u>Min. Tensile Strength</u>	<u>ASME/ANSI Min. Tensile Strength</u>	<u>D</u>	<u>L</u>	<u>Quantity</u>
<u>BL1022</u>	2x2	1.250 in	31700 lb	26000 lb	0.437 in	0.944 in	1