

U.S. Tsubaki Power Transmission, LLC
 U.S. Tsubaki Holdings, Inc.
 Corporate Headquarters
 301 E. Marquardt Dr.
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515


Email: sales@ustsubaki.com

Website: www.ustsubaki.com

BREU SERIES E2 FLANGE WITH E3 TORQUE ARM CAM CLUTCH

The BREU Series Cam Clutch is commonly used in backstopping applications that require higher speed inner race overrunning, and low to medium speed engagement speed capability. The BREU Series Cam

[+ more](#)

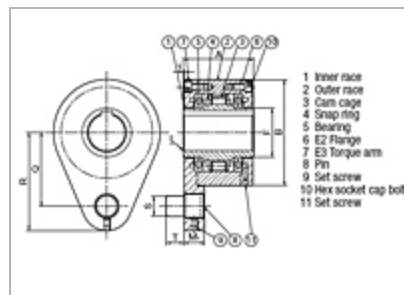

1 2

<u>Item #</u>	<u>Inner Race Keyway</u>	<u>Torque Capacity</u>	<u>Min. Inner Race Overrunning</u>	<u>Max. Inner Race Overrunning</u>	<u>Max. Engagement</u>	<u>(Overrun Height)</u>
<u>BREU30E2+E3</u>	8 x 3.3 mm	447.7 lb•ft 607.0 N•m	880 rpm	3600 rpm	350 rpm	3.9 10 n

<u>Item #</u>	<u>Inner Race Keyway</u>	<u>Torque Capacity</u>	<u>Min. Inner Race Overrunning</u>	<u>Max. Inner Race Overrunning</u>	<u>Max. Engagement</u>	<u>(Over Height)</u>
<u>BREU35E2+E3</u>	10 x 3.3 mm	506.0 lb·ft 686.0 N·m	780 rpm	3600 rpm	300 rpm	4.3 110 n
<u>BREU40E2+E3</u>	12 x 3.3 mm	722.8 lb·ft 980.0 N·m	720 rpm	3600 rpm	300 rpm	4.9 125 n
<u>BREU45E2+E3</u>	14 x 3.8 mm	795.1 lb·ft 1078.0 N·m	670 rpm	3600 rpm	280 rpm	5.1 130 n
<u>BREU50E2+E3</u>	14 x 3.8 mm	1264.9 lb·ft 1715.0 N·m	610 rpm	3600 rpm	240 rpm	5.9 150 n
<u>BREU55E2+E3</u>	16 x 4.3 mm	1445.6 lb·ft 1960.0 N·m	580 rpm	3600 rpm	220 rpm	6.2 160 n
<u>BREU60E2+E3</u>	18 x 4.4 mm	2566.0 lb·ft 3479.0 N·m	490 rpm	3600 rpm	200 rpm	6.6 170 n

<u>Item #</u>	<u>Inner Race Keyway</u>	<u>Torque Capacity</u>	<u>Min. Inner Race Overrunning</u>	<u>Max. Inner Race Overrunning</u>	<u>Max. Engagement</u>	<u>(Over Height)</u>
<u>BREU70E2+E3</u>	20 x 4.9 mm	3492.3 lb·ft 4735.0 N·m	480 rpm	3600 rpm	200 rpm	7.4 19 n
<u>BREU80E2+E3</u>	22 x 5.4 mm	4806.7 lb·ft 6517.0 N·m	450 rpm	3600 rpm	190 rpm	8.2 21 n
<u>BREU90E2+E3</u>	25 x 5.4 mm	6288.4 lb·ft 8526.0 N·m	420 rpm	3000 rpm	180 rpm	9.0 23 n
<u>BREU100E2+E3</u>	28 x 6.4 mm	10480.7 lb·ft 14210.0 N·m	460 rpm	2500 rpm	180 rpm	10. 27 n
<u>BREU130E2+E3</u>	32 x 7.4 mm	15034.4 lb·ft 20384.0 N·m	420 rpm	2200 rpm	180 rpm	12. 31 n
<u>BREU150E2+E3</u>	36 x 8.4 mm	25009.2 lb·ft 33908.0 N·m	370 rpm	1300 rpm	180 rpm	15 40 n

<u>Item #</u>	<u>Inner Race Keyway</u>	<u>Torque Capacity</u>	<u>Min. Inner Race Overrunning</u>	<u>Max. Inner Race Overrunning</u>	<u>Max. Engagement</u>	<u>(Over Height)</u>
<u>BREU30KE2+E3</u>	8 x 3.3 mm	447.7 lb·ft 607.0 N·m	880 rpm	3600 rpm	350 rpm	3.9 10 n
<u>BREU35KE2+E3</u>	10 x 3.3 mm	506.0 lb·ft 686.0 N·m	780 rpm	3600 rpm	300 rpm	4.3 11 n
<u>BREU40KE2+E3</u>	12 x 3.3 mm	722.8 lb·ft 980.0 N·m	720 rpm	3600 rpm	300 rpm	4.9 12 n
<u>BREU45KE2+E3</u>	14 x 3.8 mm	795.1 lb·ft 1078.0 N·m	670 rpm	3600 rpm	280 rpm	5.1 13 n
<u>BREU50KE2+E3</u>	14 x 3.8 mm	1264.9 lb·ft 1715.0 N·m	610 rpm	3600 rpm	240 rpm	5.9 15 n
<u>BREU55KE2+E3</u>	16 x 4.3 mm	1445.6 lb·ft 1960.0 N·m	580 rpm	3600 rpm	220 rpm	6.2 16 n
<u>BREU60KE2+E3</u>	18 x 4.4 mm	2566.0 lb·ft 3479.0 N·m	490 rpm	3600 rpm	200 rpm	6.6 17 n

<u>Item #</u>	<u>Inner Race Keyway</u>	<u>Torque Capacity</u>	<u>Min. Inner Race Overrunning</u>	<u>Max. Inner Race Overrunning</u>	<u>Max. Engagement</u>	<u>(Over Height)</u>
<u>BREU70KE2+E3</u>	20 x 4.9 mm	3492.3 lb·ft 4735.0 N·m	480 rpm	3600 rpm	200 rpm	7.4 19 n
<u>BREU80KE2+E3</u>	22 x 5.4 mm	4806.7 lb·ft 6517.0 N·m	450 rpm	3600 rpm	190 rpm	8.2 21 n
<u>BREU90KE2+E3</u>	25 x 5.4 mm	6288.4 lb·ft 8526.0 N·m	420 rpm	3000 rpm	180 rpm	9.0 23 n
<u>BREU100KE2+E3</u>	28 x 6.4 mm	10480.7 lb·ft 14210.0 N·m	460 rpm	2500 rpm	180 rpm	10. 27 n
<u>BREU130KE2+E3</u>	32 x 7.4 mm	15034.4 lb·ft 20384.0 N·m	420 rpm	2200 rpm	180 rpm	12. 31 n