

U.S. Tsubaki Power Transmission, LLC  
 U.S. Tsubaki Holdings, Inc.  
 Corporate Headquarters  
 301 E. Marquardt Dr.  
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: [sales@ustsubaki.com](mailto:sales@ustsubaki.com)


Website: [www.ustsubaki.com](http://www.ustsubaki.com)

## BS/DIN ROLLER STAINLESS STEEL CHAINS

### 304 SS SERIES

SS Series chains are made completely of 304 stainless steel. SS Series has an excellent resistance to corrosion & temperature extremes. It is generally considered non-magnetic,

[+ more](#)

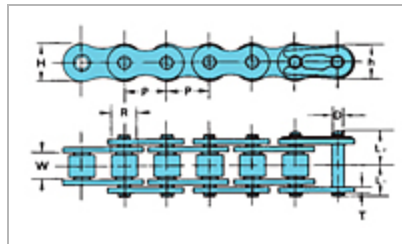

1

<u>Item #</u>	<u>ISO BS/DIN No.</u>	<u>P - Pitch</u>	<u>R - Roller Diameter</u>	<u>W - Width Between Roller Link Plates</u>	<u>D</u>	<u>L1</u>	<u>Quantity</u>
<u>RF06BSSRB</u>	06B	0.375 in	0.250 in	0.225 in	0.129 in	0.255 in	<input type="text" value="1"/>
<u>RS08BSSRB</u>	08B	0.500 in	0.335 in	0.305 in	0.175 in	0.329 in	<input type="text" value="1"/>

<u>Item #</u>	<u>ISO BS/DIN No.</u>	<u>P - Pitch</u>	<u>R - Roller Diameter</u>	<u>W - Width Between Roller Link Plates</u>	<u>D</u>	<u>L1</u>	<u>Quantity</u>
<u>RS10BSSRB</u>	10B	0.625 in	0.400 in	0.380 in	0.200 in	0.370 in	1
<u>RS12BSSRB</u>	12B	0.750 in	0.475 in	0.460 in	0.225 in	0.433 in	1
<u>RS16BSSRB</u>	16B	1.000 in	0.625 in	0.670 in	0.326 in	0.705 in	1
<u>RF06BSS- 2RB</u>	06B	0.375 in	0.250 in	0.225 in	0.129 in	0.451 in	1
<u>RS08BSS- 2RB</u>	08B	0.500 in	0.335 in	0.305 in	0.175 in	0.603 in	1
<u>RS10BSS- 2RB</u>	10B	0.625 in	0.400 in	0.380 in	0.200 in	0.699 in	1
<u>RS12BSS- 2RB</u>	12B	0.750 in	0.475 in	0.460 in	0.225 in	0.819 in	1
<u>RS16BSS- 2RB</u>	16B	1.000 in	0.625 in	0.670 in	0.326 in	1.335 in	1
<u>RS08BSS- 3RB</u>	08B	0.500 in	0.335 in	0.305 in	0.175 in	0.876 in	1
<u>RS10BSS- 3RB</u>	10B	0.625 in	0.400 in	0.380 in	0.200 in	1.026 in	1
<u>RS12BSS- 3RB</u>	12B	0.750 in	0.475 in	0.460 in	0.225 in	1.205 in	1

<u>Item #</u>	<u>ISO BS/DIN No.</u>	<u>P - Pitch</u>	<u>R - Roller Diameter</u>	<u>W - Width Between Roller Link Plates</u>	<u>D</u>	<u>L1</u>	<u>Quantity</u>
<u>RS16BSS- 3RB</u>	16B	1.000 in	0.625 in	0.670 in	0.326 in	1.963 in	1