

U.S. Tsubaki Power Transmission, LLC  
 U.S. Tsubaki Holdings, Inc.  
 Corporate Headquarters  
 301 E. Marquardt Dr.  
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: [sales@ustsubaki.com](mailto:sales@ustsubaki.com)


Website: [www.ustsubaki.com](http://www.ustsubaki.com)

## DOUBLE PLUS® CHAIN

### The best solution for preventing jamming.

On conveyor lines, small parts, like nuts and bolts, can fall into the gaps between the guides and rollers, causing the chain to jam. U.S. Tsubaki DOUBLE

[+ more](#)

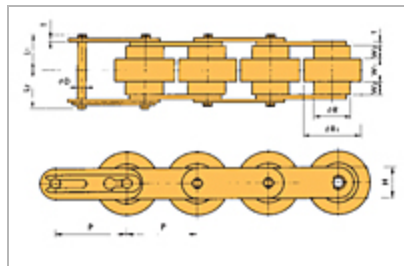

1 2

Item #	P - Pitch	R	R1	W1	W2	Quantity
<u>C2030VRP-</u> <u>HCP</u>	0.750 in	0.469 in	0.720 in	0.315 in	0.157 in	1
<u>C2040VRP-</u> <u>HCP</u>	1.000 in	0.625 in	0.969 in	0.406 in	0.224 in	1

<u>Item #</u>	<u>P - Pitch</u>	<u>R</u>	<u>R1</u>	<u>W1</u>	<u>W2</u>	<u>Quantity</u>
<u>C2050VRP-HCP</u>	1.250 in	0.750 in	1.205 in	0.512 in	0.280 in	1
<u>C2060VRP-HCP</u>	1.500 in	0.875 in	1.441 in	0.610 in	0.335 in	1
<u>C2080VRP-HCP</u>	2.000 in	1.125 in	1.890 in	0.787 in	0.591 in	1
<u>C2030VRP-HCP-SC</u>	0.750 in	0.469 in	0.720 in	0.315 in	0.157 in	1
<u>C2040VRP-HCP-SC</u>	1.000 in	0.625 in	0.969 in	0.406 in	0.224 in	1
<u>C2050VRP-HCP-SC</u>	1.250 in	0.750 in	1.205 in	0.512 in	0.280 in	1
<u>C2060VRP-HCP-SC</u>	1.500 in	0.875 in	1.441 in	0.610 in	0.335 in	1
<u>C2080VRP-HCP-SC</u>	2.000 in	1.125 in	1.890 in	0.787 in	0.591 in	1
<u>C2030VRP-SS</u>	0.750 in	0.469 in	0.720 in	0.315 in	0.157 in	1
<u>C2040VRP-SS</u>	1.000 in	0.625 in	0.969 in	0.406 in	0.224 in	1
<u>C2050VRP-SS</u>	1.250 in	0.750 in	1.205 in	0.512 in	0.280 in	1
<u>C2060VRP-SS</u>	1.500 in	0.875 in	1.441 in	0.610 in	0.335 in	1

<u>Item #</u>	<u>P - Pitch</u>	<u>R</u>	<u>R1</u>	<u>W1</u>	<u>W2</u>	<u>Quantity</u>
<u>C2080VRP-SS</u>	2.000 in	1.125 in	1.890 in	0.787 in	0.591 in	1
<u>C2030VRP-SS-SC</u>	0.750 in	0.469 in	0.720 in	0.315 in	0.157 in	1
<u>C2040VRP-SS-SC</u>	1.000 in	0.625 in	0.969 in	0.406 in	0.224 in	1
<u>C2050VRP-SS-SC</u>	1.250 in	0.750 in	1.205 in	0.512 in	0.280 in	1
<u>C2060VRP-SS-SC</u>	1.500 in	0.875 in	1.441 in	0.610 in	0.335 in	1
<u>C2080VRP-SS-SC</u>	2.000 in	1.125 in	1.890 in	0.787 in	0.591 in	1
<u>C2030VR-HCP</u>	0.750 in	0.469 in	0.720 in	0.315 in	0.157 in	1
<u>C2040VR-HCP</u>	1.000 in	0.625 in	0.969 in	0.406 in	0.224 in	1
<u>C2050VR-HCP</u>	1.250 in	0.750 in	1.205 in	0.512 in	0.280 in	1
<u>C2060VR-HCP</u>	1.500 in	0.875 in	1.441 in	0.610 in	0.335 in	1
<u>C2030VR-HCP-SC</u>	0.750 in	0.469 in	0.720 in	0.315 in	0.157 in	1