

U.S. Tsubaki Power Transmission, LLC
 U.S. Tsubaki Holdings, Inc.
 Corporate Headquarters
 301 E. Marquardt Dr.
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: sales@ustsubaki.com


Website: www.ustsubaki.com

GRIPPER CHAIN

For form, fill, and vacuum seal wrapping applications.

Tsubaki stainless steel corrosion resistant Gripper Chain™ is your solution for challenging environments. This chain combines the proven gripper

[+ more](#)

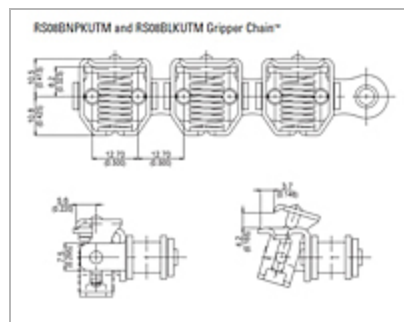

1

<u>Item #</u>	<u>ISO Ref.</u>	<u>Connecting Link</u>	<u>Pitch</u>	<u>Roller Diameter</u>	<u>Inside Width</u>	<u>Clamp Type</u>	<u>Clamp Force</u>
<u>RS08BNPKUTM</u>	08B-1	RS08BNPKUTMCL	0.500 in 12.7 mm	0.335 in 8.51 mm	0.305 in 7.75 mm	Type M	50 N

<u>Item #</u>	<u>ISO Ref.</u>	<u>Connecting Link</u>	<u>Pitch</u>	<u>Roller Diameter</u>	<u>Inside Width</u>	<u>Clamp Type</u>	<u>Clamp Force</u>
<u>RS10BNPKUTM</u>	10B-1	RS10BNPKUTMCL	0.625 in 15.875 mm	0.400 in 10.16 mm	0.380 in 9.65 mm	Type M	55 N
<u>RS08BNPKUTS</u>	08B-1	RS08BNPKUTSCL	0.500 in 12.7 mm	0.335 in 8.51 mm	0.305 in 7.75 mm	Standard	55 N
<u>RS08BLKUTM</u>	08B-1	RS08BLKUTMCL	0.500 in 12.7 mm	0.335 in 8.51 mm	0.305 in 7.75 mm	Type M	50 N
<u>RS10BLKUTM</u>	10B-1	RS10BLKUTMCL	0.625 in 15.875 mm	0.400 in 10.16 mm	0.380 in 9.65 mm	Type M	55 N
<u>RS08BLKUTS</u>	08B-1	RS08BLKUTSCL	0.500 in 12.7 mm	0.335 in 8.51 mm	0.305 in 7.75 mm	Standard	55 N
<u>RS08BSSKUTM</u>	08B-1	RS08BSSKUTMCL	0.500 in 12.7 mm	0.335 in 8.51 mm	0.305 in 7.75 mm	Type M	50 N
<u>RS10BSSKUTM</u>	10B-1	RS10BSSKUTMCL	0.625 in 15.875 mm	0.400 in 10.16 mm	0.380 in 9.65 mm	Type M	55 N

<u>Item #</u>	<u>ISO Ref.</u>	<u>Connecting Link</u>	<u>Pitch</u>	<u>Roller Diameter</u>	<u>Inside Width</u>	<u>Clamp Type</u>	<u>Clamp Force</u>
			mm		mm		
<u>RS08BSSKUTS</u>	08B-1	RS08BSSKUTSCL	0.500 in 12.7 mm	0.335 in 8.51 mm	0.305 in 7.75 mm	Standard	55 N
<u>RS08BASKUTM</u>	08B-1	RS08BASKUTMCL	0.500 in 12.7 mm	0.335 in 8.51 mm	0.305 in 7.75 mm	Type M	50 N
<u>RS10BASKUTM</u>	10B-1	RS10BASKUTMCL	0.625 in 15.875 mm	0.400 in 10.16 mm	0.380 in 9.65 mm	Type M	55 N