

U.S. Tsubaki Power Transmission, LLC
 U.S. Tsubaki Holdings, Inc.
 Corporate Headquarters
 301 E. Marquardt Dr.
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: sales@ustsubaki.com


Website: www.ustsubaki.com

MZ SERIES CAM CLUTCH

MZ Series Cam Clutch products are designed for general overrunning applications. The MZ Series can be used in applications which require the inner or outer race to have overrunning capability.

The MZ

[+ more](#)

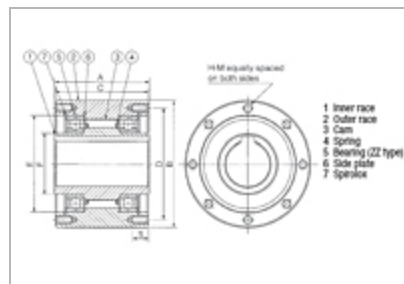

1

<u>Item #</u>	<u>Bore Size</u>	<u>Bore Keyway</u>	<u>Torque Capacity</u>	<u>Drag Torque</u>	<u>Max. Overrunning Shaft</u>	<u>Max. Overrunning Outer Race</u>	<u>Quantity</u>
---------------	------------------	--------------------	------------------------	--------------------	-------------------------------	------------------------------------	-----------------

<u>Item #</u>	<u>Bore Size</u>	<u>Bore Keyway</u>	<u>Torque Capacity</u>	<u>Drag Torque</u>	<u>Max. Overrunning Shaft</u>	<u>Max. Overrunning Outer Race</u>	<u>Quantity</u>
<u>MZ15-H</u>	0.500 in	1/8 x 1/16"	137.2 lb·ft 186.0 N·m	0.148 lb·ft 0.20 N·m	2200 rpm	900 rpm	1
<u>MZ15-15</u>	15.00 mm	5 x 2.3 mm	137.2 lb·ft 186.0 N·m	0.148 lb·ft 0.20 N·m	2200 rpm	900 rpm	1
<u>MZ17-J</u>	0.625 in	1/16 x 3/32"	158.6 lb·ft 215.0 N·m	0.148 lb·ft 0.20 N·m	2000 rpm	800 rpm	1
<u>MZ17-17</u>	17.00 mm	5 x 2.3 mm	158.6 lb·ft 215.0 N·m	0.148 lb·ft 0.20 N·m	2000 rpm	800 rpm	1
<u>MZ20-L</u>	0.750 in	3/16 x 3/32"	238.2 lb·ft 323.0 N·m	0.214 lb·ft 0.29 N·m	1900 rpm	700 rpm	1
<u>MZ20-20</u>	20.00 mm	6 x 2.8 mm	238.2 lb·ft 323.0 N·m	0.214 lb·ft 0.29 N·m	1900 rpm	700 rpm	1
			542.1	0.288			

<u>Item #</u>	<u>Bore Size</u>	<u>Bore Keyway</u>	<u>Torque Capacity</u>	<u>Drag Torque</u>	<u>Max. Overrunning Shaft</u>	<u>Max. Overrunning Outer Race</u>	<u>Quantity</u>
<u>MZ30-22</u>	22.00 mm	6 x 2.8 mm	lb·ft 735.0 N·m	lb·ft 0.39 N·m	1800 rpm	500 rpm	1
<u>MZ30-P</u>	0.875 in	3/16 x 3/32"	542.1 lb·ft 735.0 N·m	0.288 lb·ft 0.39 N·m	1800 rpm	500 rpm	1
<u>MZ30-25</u>	25.00 mm	8 x 3.3 mm	542.1 lb·ft 735.0 N·m	0.288 lb·ft 0.39 N·m	1800 rpm	500 rpm	1
<u>MZ30-1</u>	1.000 in	1/4 x 1/8"	542.1 lb·ft 735.0 N·m	0.288 lb·ft 0.39 N·m	1800 rpm	500 rpm	1
<u>MZ30-30</u>	30.00 mm	10 x 3.3 mm	542.1 lb·ft 735.0 N·m	0.288 lb·ft 0.39 N·m	1800 rpm	500 rpm	1
<u>MZ35-1D</u>	1.250 in	1/4 x 1/8"	796.6 lb·ft 1080.0 N·m	0.361 lb·ft 0.49 N·m	1700 rpm	300 rpm	1
<u>MZ35-35</u>	35.00 mm	10 x 3.3 mm	796.6 lb·ft 1080.0	0.361 lb·ft 0.49	1700 rpm	300 rpm	1

<u>Item #</u>	<u>Bore Size</u>	<u>Bore Keyway</u>	<u>Torque Capacity</u>	<u>Drag Torque</u>	<u>Max. Overrunning Shaft</u>	<u>Max. Overrunning Outer Race</u>	<u>Quantity</u>
			N•m	N•m			
<u>MZ45-1H</u>	1.500 in	3/8 x 3/16"	1194.8 lb•ft 1620.0 N•m	0.509 lb•ft 0.69 N•m	1700 rpm	300 rpm	1
<u>MZ45-40</u>	40.00 mm	12 x 3.3 mm	1194.8 lb•ft 1620.0 N•m	0.509 lb•ft 0.69 N•m	1700 rpm	300 rpm	1
<u>MZ45-1L</u>	1.750 in	3/8 x 3/16"	1194.8 lb•ft 1620.0 N•m	0.509 lb•ft 0.69 N•m	1700 rpm	300 rpm	1
<u>MZ45-45</u>	45.00 mm	14 x 3.8 mm	1194.8 lb•ft 1620.0 N•m	0.509 lb•ft 0.69 N•m	1700 rpm	300 rpm	1
<u>MZ60-50</u>	50.00 mm	14 x 3.8 mm	1556.3 lb•ft 2110.0 N•m	0.723 lb•ft 0.98 N•m	1600 rpm	250 rpm	1
<u>MZ60-2</u>	2.000 in	1/2 x 1/4"	1556.3 lb•ft 2110.0 N•m	0.723 lb•ft 0.98 N•m	1600 rpm	250 rpm	1
			1556.3	0.723			

<u>Item #</u>	<u>Bore Size</u>	<u>Bore Keyway</u>	<u>Torque Capacity</u>	<u>Drag Torque</u>	<u>Max. Overrunning Shaft</u>	<u>Max. Overrunning Outer Race</u>	<u>Quantity</u>
<u>MZ60-55</u>	55.00 mm	16 x 4.3 mm	lb·ft 2110.0 N·m	lb·ft 0.98 N·m	1600 rpm	250 rpm	1
<u>MZ60-60</u>	60.00 mm	18 x 4.4 mm	1556.3 lb·ft 2110.0 N·m	0.723 lb·ft 0.98 N·m	1600 rpm	250 rpm	1
<u>MZ70-65</u>	65.00 mm	18 x 4.4 mm	2242.2 lb·ft 3040.0 N·m	0.937 lb·ft 1.27 N·m	1300 rpm	250 rpm	1
<u>MZ70-70</u>	70.00 mm	20 x 4.9 mm	2242.2 lb·ft 3040.0 N·m	0.937 lb·ft 1.27 N·m	1300 rpm	250 rpm	1