

U.S. Tsubaki Power Transmission, LLC
 U.S. Tsubaki Holdings, Inc.
 Corporate Headquarters
 301 E. Marquardt Dr.
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515


Email: sales@ustsubaki.com

Website: www.ustsubaki.com

POWER-LOCK AD INCH SERIES KEYLESS LOCKING DEVICE

- Offers the greatest allowable transmissible torque of all Tsubaki Power Locks®
- Ideal for multi-strand or large hub sprockets
- Self-centering to control eccentricity
- Inch size range: 3/4" - 11 13/16"

[+ more](#)

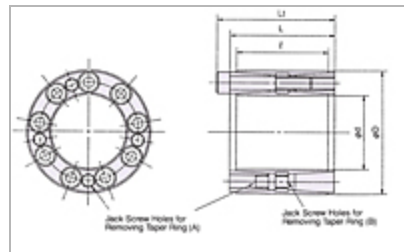

<u>Item #</u>	<u>d - Shaft O.D.</u>	<u>D - Hub Counter I.D.</u>	<u>I</u>	<u>L</u>	<u>Lt</u>	<u>Transmissible Torque</u>	<u>Quantity</u>
<u>PLLAD</u>	0.750 in	1.850 in	1.181 in	1.378 in	1.614 in	283 ft•lb	1
<u>PLPAD</u>	0.875 in	1.850 in	1.181 in	1.378 in	1.614 in	329 ft•lb	1
<u>PL1AD</u>	1.000 in	1.969 in	1.378 in	1.575 in	1.811 in	507 ft•lb	1
<u>PL1BAD</u>	1.125 in	2.165 in	1.378 in	1.575 in	1.811 in	569 ft•lb	1
<u>PL1CAD</u>	1.188 in	2.159 in	1.378 in	1.575 in	1.811 in	581 ft•lb	1
<u>PL1DAD</u>	1.250 in	2.362 in	1.772 in	1.969 in	2.205 in	929 ft•lb	1
<u>PL1FAD</u>	1.375 in	2.365 in	1.772 in	1.969 in	2.205 in	1008 ft•lb	1
<u>PL1GAD</u>	1.438 in	2.559 in	2.047 in	2.244 in	2.480 in	1184 ft•lb	1
<u>PL1HAD</u>	1.500 in	2.559 in	2.047 in	2.244 in	2.480 in	1235 ft•lb	1
<u>PL1JAD</u>	1.625 in	2.953 in	2.205 in	2.520 in	2.835 in	2559 ft•lb	1
<u>PL1KAD</u>	1.688 in	2.953 in	2.205 in	2.520 in	2.835 in	2657 ft•lb	1

<u>Item #</u>	<u>d - Shaft O.D.</u>	<u>D - Hub Counter I.D.</u>	<u>I</u>	<u>L</u>	<u>Lt</u>	<u>Transmissible Torque</u>	<u>Quantity</u>
<u>PL1LAD</u>	1.750 in	2.953 in	2.205 in	2.520 in	2.835 in	2783 ft•lb	1
<u>PL1PAD</u>	1.875 in	3.150 in	2.205 in	2.520 in	2.835 in	2958 ft•lb	1
<u>PL1RAD</u>	1.938 in	3.150 in	2.205 in	2.520 in	2.835 in	3056 ft•lb	1
<u>PL2AD</u>	2.000 in	3.346 in	2.205 in	2.520 in	2.835 in	3141 ft•lb	1
<u>PL2BAD</u>	2.125 in	3.346 in	2.205 in	2.520 in	2.835 in	3337 ft•lb	1
<u>PL2CAD</u>	2.188 in	3.543 in	2.205 in	2.520 in	2.835 in	4214 ft•lb	1
<u>PL2DAD</u>	2.250 in	3.543 in	2.205 in	2.520 in	2.835 in	4335 ft•lb	1
<u>PL2FAD</u>	2.375 in	3.531 in	2.205 in	2.520 in	2.835 in	4575 ft•lb	1
<u>PL2GAD</u>	2.438 in	3.740 in	2.205 in	2.520 in	2.835 in	4749 ft•lb	1
<u>PL2HAD</u>	2.500 in	3.740 in	2.205 in	2.520 in	2.835 in	4871 ft•lb	1
<u>PL2IAD</u>	2.562 in	3.737 in	2.205 in	2.520 in	2.835 in	4993 ft•lb	1

<u>Item #</u>	<u>d - Shaft O.D.</u>	<u>D - Hub Counter I.D.</u>	<u>I</u>	<u>L</u>	<u>Lt</u>	<u>Transmissible Torque</u>	<u>Quantity</u>
<u>PL2JAD</u>	2.625 in	4.337 in	2.756 in	3.071 in	3.465 in	8149 ft·lb	1
<u>PL2KAD</u>	2.688 in	4.337 in	2.756 in	3.071 in	3.465 in	8343 ft·lb	1
<u>PL2LAD</u>	2.750 in	4.337 in	2.756 in	3.071 in	3.465 in	8537 ft·lb	1