

U.S. Tsubaki Power Transmission, LLC  
 U.S. Tsubaki Holdings, Inc.  
 Corporate Headquarters  
 301 E. Marquardt Dr.  
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: [sales@ustsubaki.com](mailto:sales@ustsubaki.com)


Website: [www.ustsubaki.com](http://www.ustsubaki.com)

## RS ROLLER NICKEL-PLATED CHAINS

### NICKEL-PLATED CHAIN

Nickel-Plated chains provide acceptable performance where equipment must operate in mildly corrosive environments.

Double strand nickel-plated chains are also available.

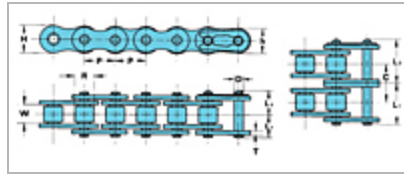

1

<u>Item #</u>	<u>Strand</u>	<u>ANSI No.</u>	<u>P - Pitch</u>	<u>W - Width Between Roller Link Plates</u>	<u>D</u>	<u>Quantity</u>
<u>25NPRB</u>	Single	25	0.250 in	0.125 in	0.090 in	1
<u>35NPRB</u>	Single	35	0.375 in	0.188 in	0.141 in	1
<u>41NPRB</u>	Single	41	0.500 in	0.250 in	0.141 in	1

<u>Item #</u>	<u>Strand</u>	<u>ANSI No.</u>	<u>P - Pitch</u>	<u>W - Width Between Roller Link Plates</u>	<u>D</u>	<u>Quantity</u>
<u>40NPRB</u>	Single	40	0.500 in	0.312 in	0.156 in	1
<u>50NPRB</u>	Single	50	0.625 in	0.375 in	0.200 in	1
<u>60NPRB</u>	Single	60	0.750 in	0.500 in	0.234 in	1
<u>80NPRB</u>	Single	80	1.000 in	0.625 in	0.312 in	1
<u>100NPRB</u>	Single	100	1.250 in	0.750 in	0.375 in	1
<u>100NPCB</u>	Single	100	1.250 in	0.750 in	0.375 in	1
<u>120NPRB</u>	Single	120	1.500 in	1.000 in	0.437 in	1
<u>120NPCB</u>	Single	120	1.500 in	1.000 in	0.437 in	1
<u>35-2NPRB</u>	Double	35	0.375 in	0.188 in	0.141 in	1
<u>40-2NPRB</u>	Double	40	0.500 in	0.312 in	0.156 in	1
<u>50-2NPRB</u>	Double	50	0.625 in	0.375 in	0.200 in	1

<u>Item #</u>	<u>Strand</u>	<u>ANSI No.</u>	<u>P - Pitch</u>	<u>W - Width Between Roller Link Plates</u>	<u>D</u>	<u>Quantity</u>
<u>60-2NPRB</u>	Double	60	0.750 in	0.500 in	0.234 in	1
<u>80-2NPRB</u>	Double	80	1.000 in	0.625 in	0.312 in	1
<u>100-2NPRB</u>	Double	100	1.250 in	0.750 in	0.375 in	1
<u>100-2NPCB</u>	Double	100	1.250 in	0.750 in	0.375 in	1
<u>120-2NPRB</u>	Double	120	1.500 in	1.000 in	0.437 in	1
<u>120-2NPCB</u>	Double	120	1.500 in	1.000 in	0.437 in	1