



U.S. Tsubaki Power Transmission, LLC
 U.S. Tsubaki Holdings, Inc.
 Corporate Headquarters
 301 E. Marquardt Dr.
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: sales@ustsubaki.com



Website: www.ustsubaki.com

RS SINGLE PITCH ATTACHMENT CHAINS

RS ROLLER CHAIN ATTACHMENTS

U.S. Tsubaki RS single pitch roller chains may be adapted for conveying duties by the addition of attachments. The standard types of attachments include bent or straight

[+ more](#)

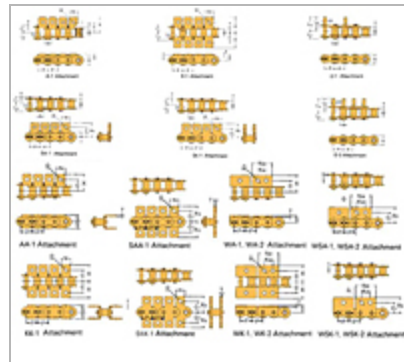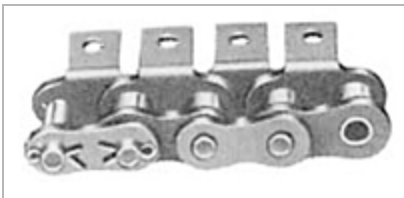

1 2 3 4 5

<u>Item #</u>	<u>Attachment Number</u>	<u>ANSI No.</u>	<u>P - Pitch</u>	<u>W - Width Between Roller Link Plates</u>	<u>R - Roller Diameter</u>	<u>Quantity</u>
<u>RS25 A-1</u>	A-1	25	0.250 in	0.125 in	0.130 in	1

<u>Item #</u>	<u>Attachment Number</u>	<u>ANSI No.</u>	<u>P - Pitch</u>	<u>W - Width Between Roller Link Plates</u>	<u>R - Roller Diameter</u>	<u>Quantity</u>
<u>RS35 A-1</u>	A-1	35	0.375 in	0.188 in	0.200 in	1
<u>RS41 A-1</u>	A-1	41	0.500 in	0.250 in	0.306 in	1
<u>RS40 A-1</u>	A-1	40	0.500 in	0.312 in	0.312 in	1
<u>RS50 A-1</u>	A-1	50	0.625 in	0.375 in	0.400 in	1
<u>RS60 A-1</u>	A-1	60	0.750 in	0.500 in	0.469 in	1
<u>RS80 A-1</u>	A-1	80	1.000 in	0.625 in	0.625 in	1
<u>RS100 A-1</u>	A-1	100	1.250 in	0.750 in	0.750 in	1
<u>RS120 A-1</u>	A-1	120	1.500 in	1.000 in	0.875 in	1
<u>RS140 A-1</u>	A-1	140	1.750 in	1.000 in	1.000 in	1
<u>RS160 A-1</u>	A-1	160	2.000 in	1.250 in	1.125 in	1
<u>RS25 K-1</u>	K-1	25	0.250 in	0.125 in	0.130 in	1

<u>Item #</u>	<u>Attachment Number</u>	<u>ANSI No.</u>	<u>P - Pitch</u>	<u>W - Width Between Roller Link Plates</u>	<u>R - Roller Diameter</u>	<u>Quantity</u>
<u>RS35 K-1</u>	K-1	35	0.375 in	0.188 in	0.200 in	1
<u>RS41 K-1</u>	K-1	41	0.500 in	0.250 in	0.306 in	1
<u>RS40 K-1</u>	K-1	40	0.500 in	0.312 in	0.312 in	1
<u>RS50 K-1</u>	K-1	50	0.625 in	0.375 in	0.400 in	1
<u>RS60 K-1</u>	K-1	60	0.750 in	0.500 in	0.469 in	1
<u>RS80 K-1</u>	K-1	80	1.000 in	0.625 in	0.625 in	1
<u>RS100 K-1</u>	K-1	100	1.250 in	0.750 in	0.750 in	1
<u>RS120 K-1</u>	K-1	120	1.500 in	1.000 in	0.875 in	1
<u>RS140 K-1</u>	K-1	140	1.750 in	1.000 in	1.000 in	1
<u>RS160 K-1</u>	K-1	160	2.000 in	1.250 in	1.125 in	1
<u>RS25 SA-1</u>	SA-1	25	0.250 in	0.125 in	0.130 in	1

<u>Item #</u>	<u>Attachment Number</u>	<u>ANSI No.</u>	<u>P - Pitch</u>	<u>W - Width Between Roller Link Plates</u>	<u>R - Roller Diameter</u>	<u>Quantity</u>
<u>RS35 SA-1</u>	SA-1	35	0.375 in	0.188 in	0.200 in	1
<u>RS41 SA-1</u>	SA-1	41	0.500 in	0.250 in	0.306 in	1

1 2 3 4 5