

U.S. Tsubaki Power Transmission, LLC  
 U.S. Tsubaki Holdings, Inc.  
 Corporate Headquarters  
 301 E. Marquardt Dr.  
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: [sales@ustsubaki.com](mailto:sales@ustsubaki.com)


Website: [www.ustsubaki.com](http://www.ustsubaki.com)

## RS-T SERIES CHAINS

### T Series

T Series chains have greater shock load resistance and higher ultimate tensile strength than comparable ASME/ANSI standard roller chains. This is accomplished by using thru hardened pins.

[+ more](#)

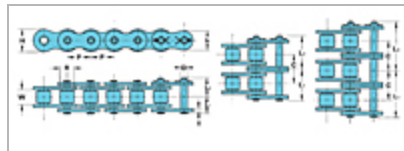

1 2

<u>Item #</u>	<u>ANSI No.</u>	<u>Standard Type of Pin</u>	<u>Strand</u>	<u>P - Pitch</u>	<u>R - Roller Diameter</u>	<u>W - Width Between Roller Link Plates</u>	<u>Quantity</u>
<u>60TRB</u>	60	Riveted	Single	0.750 in	0.469 in	0.500 in	1

<u>Item #</u>	<u>ANSI No.</u>	<u>Standard Type of Pin</u>	<u>Strand</u>	<u>P - Pitch</u>	<u>R - Roller Diameter</u>	<u>W - Width Between Roller Link Plates</u>	<u>Quantity</u>
<u>60TCB</u>	60	Cottered	Single	0.750 in	0.469 in	0.500 in	1
<u>80TRB</u>	80	Riveted	Single	1.000 in	0.625 in	0.625 in	1
<u>80TCB</u>	80	Cottered	Single	1.000 in	0.625 in	0.625 in	1
<u>100TRB</u>	100	Riveted	Single	1.250 in	0.750 in	0.750 in	1
<u>100TCB</u>	100	Cottered	Single	1.250 in	0.750 in	0.750 in	1
<u>120TRB</u>	120	Riveted	Single	1.500 in	0.875 in	1.000 in	1
<u>120TCB</u>	120	Cottered	Single	1.500 in	0.875 in	1.000 in	1
<u>140TRB</u>	140	Riveted	Single	1.750 in	1.000 in	1.000 in	1
<u>140TCB</u>	140	Cottered	Single	1.750 in	1.000 in	1.000 in	1
<u>160TRB</u>	160	Riveted	Single	2.000 in	1.125 in	1.250 in	1
<u>160TCB</u>	160	Cottered	Single	2.000 in	1.125 in	1.250 in	1

<u>Item #</u>	<u>ANSI No.</u>	<u>Standard Type of Pin</u>	<u>Strand</u>	<u>P - Pitch</u>	<u>R - Roller Diameter</u>	<u>W - Width Between Roller Link Plates</u>	<u>Quantity</u>
<u>200TRB</u>	200	Riveted	Single	2.500 in	1.562 in	1.500 in	1
<u>200TCB</u>	200	Cottered	Single	2.500 in	1.562 in	1.500 in	1
<u>240TRB</u>	240	Riveted	Single	3.000 in	1.875 in	1.875 in	1
<u>240TCB</u>	240	Cottered	Single	3.000 in	1.875 in	1.875 in	1
<u>60T-2RB</u>	60	Riveted	Double	0.750 in	0.469 in	0.500 in	1
<u>60T-2CB</u>	60	Cottered	Double	0.750 in	0.469 in	0.500 in	1
<u>80T-2RB</u>	80	Riveted	Double	1.000 in	0.625 in	0.625 in	1
<u>80T-2CB</u>	80	Cottered	Double	1.000 in	0.625 in	0.625 in	1
<u>100T-2RB</u>	100	Riveted	Double	1.250 in	0.750 in	0.750 in	1
<u>100T-2CB</u>	100	Cottered	Double	1.250 in	0.750 in	0.750 in	1
<u>120T-2RB</u>	120	Riveted	Double	1.500 in	0.875 in	1.000 in	1

<u>Item #</u>	<u>ANSI No.</u>	<u>Standard Type of Pin</u>	<u>Strand</u>	<u>P - Pitch</u>	<u>R - Roller Diameter</u>	<u>W - Width Between Roller Link Plates</u>	<u>Quantity</u>
<u>120T-2CB</u>	120	Cottered	Double	1.500 in	0.875 in	1.000 in	1
<u>140T-2RB</u>	140	Riveted	Double	1.750 in	1.000 in	1.000 in	1