

U.S. Tsubaki Power Transmission, LLC

U.S. Tsubaki Holdings, Inc.

Corporate Headquarters

301 E. Marquardt Dr.

Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: sales@ustsubaki.com

Website: www.ustsubaki.com


ROLLER CONVEYOR CHAINS - 1.654" TO 5.000" PITCH

Tsubaki's Roller Conveyor Chain represents the most common and universal class of chain. Tsubaki is proud to offer a premium, well diversified portfolio designed and built in Sandusky, Ohio.

PINS

-

[+ more](#)

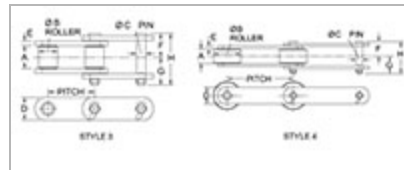

<u>Chain Number</u>	<u>Pitch</u>	<u>Sidebar Style</u>	<u>Inside Width - A</u>	<u>Roller Diameter - B</u>	<u>Pin Diameter - C</u>	<u>Sidebar Height - D</u>	<u>Sidebar Thickness - E</u>	<u>Sidebar Thickness - E</u>
<u>378RX</u>	1.654 in	3	1.00 in	0.88 in	0.44 in	1.12 in	0.19 in	0.19
<u>US278R</u>	2.609 in	3	1.12 in	0.88 in	0.44 in	1.12 in	0.19 in	0.19
<u>81X</u>	2.609 in	3	1.06 in	0.91 in	0.44 in	1.14 in	0.16 in	0.16
<u>81XH</u>	2.609 in	3	1.06 in	0.91 in	0.44 in	1.23 in	0.32 in	0.22
<u>81XHH</u>	2.609 in	3	1.06 in	0.91 in	0.44 in	1.25 in	0.30 in	0.3
<u>81X Lambda</u>	2.609 in	3	1.06 in	0.91 in	0.44 in	1.13 in	0.16 in	0.16
<u>87R</u>	2.609 in	4	1.12 in	0.88 in	0.44 in	1.12 in	0.25 in	0.25
<u>53R</u>	3.000 in	4	1.00 in	1.50 in	0.44 in	1.12 in	0.19 in	0.19
<u>93R</u>	3.000 in	4	1.25 in	1.50 in	0.50 in	1.25 in	0.25 in	0.25
<u>119RX</u>	3.075 in	3	1.50 in	1.25 in	0.62 in	1.50 in	0.31 in	0.31

<u>Chain Number</u>	<u>Pitch</u>	<u>Sidebar Style</u>	<u>Inside Width - A</u>	<u>Roller Diameter - B</u>	<u>Pin Diameter - C</u>	<u>Sidebar Height - D</u>	<u>Sidebar Thickness - E</u>	<u>Sidebar Thickness - E</u>
<u>95R</u>	4.000 in	4	1.00 in	1.50 in	0.44 in	1.12 in	0.19 in	0.19
<u>1188R</u>	4.000 in	4	1.12 in	1.75 in	0.44 in	1.12 in	0.19 in	0.19
<u>94R</u>	4.000 in	4	0.88 in	1.50 in	0.50 in	1.25 in	0.25 in	0.25
<u>97R</u>	4.000 in	4	0.88 in	1.75 in	0.50 in	1.25 in	0.25 in	0.25
<u>US90R</u>	4.000 in	4	1.19 in	2.00 in	0.44 in	1.25 in	0.19 in	0.19
<u>83R</u>	4.000 in	4	1.31 in	2.00 in	0.62 in	1.50 in	0.25 in	0.25
<u>91R</u>	4.000 in	4	1.31 in	1.75 in	0.62 in	1.50 in	0.31 in	0.31
<u>89R</u>	4.000 in	4	1.31 in	2.25 in	0.62 in	1.50 in	0.38 in	0.38
<u>84R</u>	4.000 in	4	2.31 in	2.25 in	0.62 in	1.50 in	0.38 in	0.38
<u>1113R</u>	4.040 in	4	1.31 in	2.00 in	0.62 in	1.50 in	0.31 in	0.31