

U.S. Tsubaki Power Transmission, LLC

U.S. Tsubaki Holdings, Inc.

Corporate Headquarters

301 E. Marquardt Dr.

Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: sales@ustsubaki.com

Website: www.ustsubaki.com


ROLLER CONVEYOR CHAINS - 6.000" TO 8.000" PITCH

Tsubaki's Roller Conveyor Chain represents the most common and universal class of chain. Tsubaki is proud to offer a premium, well diversified portfolio designed and built in Sandusky, Ohio.

PINS

-

[+ more](#)

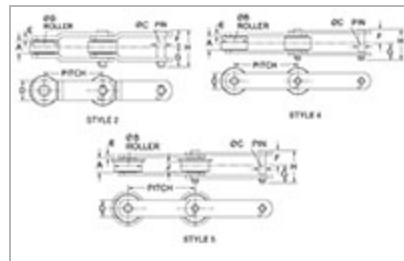

<u>Chain Number</u>	<u>Pitch</u>	<u>Sidebar Style</u>	<u>Inside Width - A</u>	<u>Roller Diameter - B</u>	<u>Pin Diameter - C</u>	<u>Sidebar Height - D</u>	<u>Sidebar Thickness - E</u>	<u>Pin Head to CL - F</u>
<u>US196R</u>	6.000 in	4	1.12 in	2.00 in	0.44 in	1.25 in	0.25 in	1.20 in
<u>604R</u>	6.000 in	4	1.31 in	2.00 in	0.56 in	1.50 in	0.25 in	1.31 in
<u>607R</u>	6.000 in	4	1.31 in	2.50 in	0.56 in	1.50 in	0.25 in	1.33 in
<u>603R</u>	6.000 in	4	1.31 in	2.50 in	0.56 in	1.50 in	0.25 in	1.33 in
<u>86R</u>	6.000 in	4	1.31 in	2.00 in	0.62 in	1.50 in	0.25 in	1.33 in
<u>627R</u>	6.000 in	4	1.31 in	2.00 in	0.62 in	1.50 in	0.31 in	1.47 in
<u>628RX</u>	6.000 in	4	1.31 in	2.25 in	0.63 in	1.75 in	0.38 in	1.59 in
<u>626R</u>	6.000 in	4	1.31 in	3.00 in	0.62 in	2.00 in	0.38 in	1.59 in
<u>629R</u>	6.000 in	4	1.50 in	3.00 in	0.62 in	1.50 in	0.31 in	1.56 in
<u>625R</u>	6.000 in	4	1.69 in	3.00 in	0.62 in	2.00 in	0.25 in	1.52 in

<u>Chain Number</u>	<u>Pitch</u>	<u>Sidebar Style</u>	<u>Inside Width - A</u>	<u>Roller Diameter - B</u>	<u>Pin Diameter - C</u>	<u>Sidebar Height - D</u>	<u>Sidebar Thickness - E</u>	<u>Pin Head to CL - F</u>
<u>CC51</u>	6.000 in	4	1.38 in	2.50 in	0.69 in	2.50 in	0.31 in	1.50 in
<u>631R</u>	6.000 in	4	1.38 in	3.00 in	0.75 in	2.00 in	0.38 in	1.66 in
<u>614R</u>	6.000 in	4	1.38 in	2.50 in	0.75 in	2.00 in	0.38 in	1.66 in
<u>1131R</u>	6.000 in	4	1.50 in	3.00 in	0.75 in	2.00 in	0.38 in	1.69 in
<u>96RX</u>	6.000 in	4	1.50 in	2.75 in	0.75 in	2.00 in	0.38 in	1.69 in
<u>2184RX</u>	6.000 in	2	1.38 in	3.00 in	0.88 in	2.00 in	0.38 in	1.72 in
<u>2178RX</u>	6.000 in	4	1.50 in	2.75 in	0.88 in	2.25 in	0.38 in	1.72 in
<u>B663R</u>	6.000 in	5	2.00 in	3.00 in	0.75 in	2.00 in	0.38 in	1.97 in
<u>610R</u>	6.000 in	4	1.69 in	2.75 in	0.88 in	2.25 in	0.38 in	1.81 in
<u>2198RX</u>	6.000 in	4	1.50 in	2.75 in	0.88 in	2.25 in	0.50 in	2.03 in

<u>Chain Number</u>	<u>Pitch</u>	<u>Sidebar Style</u>	<u>Inside Width - A</u>	<u>Roller Diameter - B</u>	<u>Pin Diameter - C</u>	<u>Sidebar Height - D</u>	<u>Sidebar Thickness - E</u>	<u>Pin Head to CL - F</u>
<u>800RX</u>	8.000 in	4	1.81 in	3.50 in	1.00 in	3.00 in	0.50 in	2.19 in