

U.S. Tsubaki Power Transmission, LLC
 U.S. Tsubaki Holdings, Inc.
 Corporate Headquarters
 301 E. Marquardt Dr.
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: sales@ustsubaki.com

Website: www.ustsubaki.com


ROLLER CONVEYOR CHAINS - 9.000" TO 18.000" PITCH

Tsubaki's Roller Conveyor Chain represents the most common and universal class of chain. Tsubaki is proud to offer a premium, well diversified portfolio designed and built in Sandusky, Ohio.

PINS

-

[+ more](#)

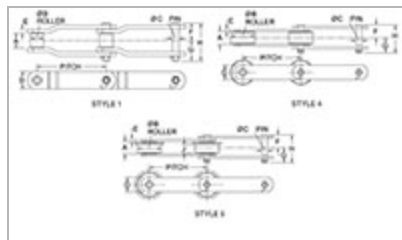

<u>Chain Number</u>	<u>Pitch</u>	<u>Sidebar Style</u>	<u>Inside Width - A</u>	<u>Roller Diameter - B</u>	<u>Pin Diameter - C</u>	<u>Sidebar Height - D</u>	<u>Sidebar Thickness - E</u>	<u>Pin Head to CL - F</u>
<u>B912R</u>	9.000 in	4	1.50 in	3.00 in	0.63 in	2.00 in	0.31 in	1.56 in
<u>925R</u>	9.000 in	5	1.69 in	3.00 in	0.63 in	2.00 in	0.25 in	1.52 in
<u>B963R</u>	9.000 in	5	2.00 in	3.50 in	0.75 in	2.00 in	0.38 in	1.97 in
<u>D963R</u>	9.000 in	4	2.00 in	3.50 in	0.75 in	2.00 in	0.38 in	1.97 in
<u>4009</u>	9.000 in	4	2.19 in	3.00 in	0.88 in	2.50 in	0.38 in	2.06 in
<u>B964R</u>	9.000 in	5	2.25 in	4.00 in	0.88 in	2.50 in	0.38 in	2.16 in
<u>4004</u>	9.000 in	4	2.63 in	3.00 in	1.00 in	2.50 in	0.50 in	2.59 in
<u>4035</u>	9.000 in	4	3.19 in	3.50 in	1.13 in	3.00 in	0.50 in	2.88 in
<u>4065</u>	9.000 in	4	3.06 in	4.25 in	1.25 in	3.50 in	0.63 in	3.06 in
<u>4037</u>	9.000 in	4	3.25 in	4.50 in	1.50 in	4.00 in	0.63 in	3.28 in

<u>Chain Number</u>	<u>Pitch</u>	<u>Sidebar Style</u>	<u>Inside Width - A</u>	<u>Roller Diameter - B</u>	<u>Pin Diameter - C</u>	<u>Sidebar Height - D</u>	<u>Sidebar Thickness - E</u>	<u>Pin Head to CL - F</u>
<u>B1263R</u>	12.000 in	5	2.00 in	3.50 in	0.75 in	2.00 in	0.38 in	1.97 in
<u>D1263R</u>	12.000 in	4	2.00 in	3.50 in	0.75 in	2.00 in	0.38 in	1.97 in
<u>4251</u>	12.000 in	1	1.94 in	1.75 in	0.88 in	2.00 in	0.50 in	2.25 in
<u>B1264R</u>	12.000 in	5	2.25 in	4.00 in	0.88 in	2.50 in	0.38 in	2.09 in
<u>B1863R</u>	18.000 in	5	2.00 in	3.50 in	0.75 in	2.00 in	0.38 in	1.97 in
<u>B1864R</u>	18.000 in	5	2.25 in	4.00 in	0.88 in	2.50 in	0.38 in	2.16 in