

U.S. Tsubaki Power Transmission, LLC
 U.S. Tsubaki Holdings, Inc.
 Corporate Headquarters
 301 E. Marquardt Dr.
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: sales@ustsubaki.com

Website: www.ustsubaki.com


SINGLE PITCH PLASTIC OUTBOARD ROLLER CONVEYOR LAMBDA®

LAMBDA for accumulating conveyors.

- Lube-free with a low center of gravity
- Long wear life
- Operates in temperatures up to 176°F (due to plastic components)

Note: For staggered outboard roller

[+ more](#)

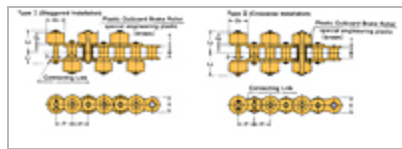

<u>Item #</u>	<u>ANSI No.</u>	<u>P - Pitch</u>	<u>R - Roller Diameter</u>	<u>W - Width Between Roller Link Plates</u>	<u>Approx. Weight</u>	<u>Spacing</u>	<u>Outboard Roller Installation</u>	<u>Qu</u>
<u>40LPSR1LT</u>	40	0.500 in	0.312 in	0.312 in	0.630 lbs/ft	At Every Link	Staggered	[
<u>40LPSC1LT</u>	40	0.500 in	0.312 in	0.312 in	0.630 lbs/ft	At Every Link	Staggered	[
<u>50LPSR1LT</u>	50	0.625 in	0.400 in	0.375 in	0.950 lbs/ft	At Every Link	Staggered	[
<u>50LPSC1LT</u>	50	0.625 in	0.400 in	0.375 in	0.950 lbs/ft	At Every Link	Staggered	[
<u>60LPSR1LT</u>	60	0.750 in	0.469 in	0.500 in	1.420 lbs/ft	At Every Link	Staggered	[
<u>60LPSC1LT</u>	60	0.750 in	0.469 in	0.500 in	1.420 lbs/ft	At Every Link	Staggered	[
<u>40LPSR2LT</u>	40	0.500 in	0.312 in	0.312 in	0.630 lbs/ft	At Every 2nd Link	Crosswise	[
<u>40LPSC2LT</u>	40	0.500 in	0.312 in	0.312 in	0.630 lbs/ft	At Every 2nd Link	Crosswise	[
<u>50LPSR2LT</u>	50	0.625 in	0.400 in	0.375 in	0.950 lbs/ft	At Every 2nd Link	Crosswise	[
<u>50LPSC2LT</u>	50	0.625 in	0.400 in	0.375 in	0.950 lbs/ft	At Every 2nd Link	Crosswise	[

<u>Item #</u>	<u>ANSI No.</u>	<u>P - Pitch</u>	<u>R - Roller Diameter</u>	<u>W - Width Between Roller Link Plates</u>	<u>Approx. Weight</u>	<u>Spacing</u>	<u>Outboard Roller Installation</u>	<u>Qu</u>
<u>60LPSR2LT</u>	60	0.750 in	0.469 in	0.500 in	1.420 lbs/ft	At Every 2nd Link	Crosswise	[
<u>60LPSC2LT</u>	60	0.750 in	0.469 in	0.500 in	1.420 lbs/ft	At Every 2nd Link	Crosswise	[