

U.S. Tsubaki Power Transmission, LLC
 U.S. Tsubaki Holdings, Inc.
 Corporate Headquarters
 301 E. Marquardt Dr.
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: sales@ustsubaki.com


Website: www.ustsubaki.com

SINGLE STRAND DRIVE LAMBDA® CHAINS

LAMBDA for lube-free drive applications

- Operates in temperatures up to 302°F
- High Temperature Lambda (as designated by KF) can operate at temperature of 446°F
- Same maximum allowable load as our

[+ more](#)

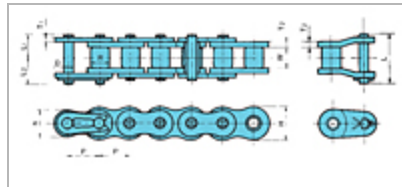

1

<u>Item #</u>	<u>ANSI No.</u>	<u>Standard Type of Pin</u>	<u>P - Pitch</u>	<u>R - Roller Diameter</u>	<u>W - Width Between Roller Link Plates</u>	<u>T1 - PLP Thickness</u>	<u>Quantity</u>
<u>40LAMRB</u>	40	Riveted	0.500 in	0.312 in	0.297 in	0.060 in	1
<u>50LAMRB</u>	50	Riveted	0.625 in	0.400 in	0.365 in	0.080 in	1

<u>Item #</u>	<u>ANSI No.</u>	<u>Standard Type of Pin</u>	<u>P - Pitch</u>	<u>R - Roller Diameter</u>	<u>W - Width Between Roller Link Plates</u>	<u>T1 - PLP Thickness</u>	<u>Quantity</u>
<u>60LAMRB</u>	60	Riveted	0.750 in	0.469 in	0.483 in	0.094 in	1
<u>80LAMRB</u>	80	Riveted	1.000 in	0.625 in	0.609 in	0.125 in	1
<u>80LAMCB</u>	80	Cottered	1.000 in	0.625 in	0.609 in	0.125 in	1
<u>100LAMRB</u>	100	Riveted	1.250 in	0.750 in	0.736 in	0.156 in	1
<u>100LAMCB</u>	100	Cottered	1.250 in	0.750 in	0.736 in	0.156 in	1
<u>120LAMRB</u>	120	Riveted	1.500 in	0.875 in	0.974 in	0.187 in	1
<u>120LAMCB</u>	120	Cottered	1.500 in	0.875 in	0.974 in	0.187 in	1
<u>140LAMRB</u>	140	Riveted	1.750 in	1.000 in	0.974 in	0.220 in	1
<u>140LAMCB</u>	140	Cottered	1.750 in	1.000 in	0.974 in	0.220 in	1