

U.S. Tsubaki Power Transmission, LLC  
 U.S. Tsubaki Holdings, Inc.  
 Corporate Headquarters  
 301 E. Marquardt Dr.  
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500



Fax: 847.459.9515

Email: [sales@ustsubaki.com](mailto:sales@ustsubaki.com)

Website: [www.ustsubaki.com](http://www.ustsubaki.com)

## TGX SERIES TGX10-TGX70 SHOCK GUARD

A high-precision option, the TGX series features no backlash and unsurpassed operation rigidity. Ideal for machines that require accurate positioning.

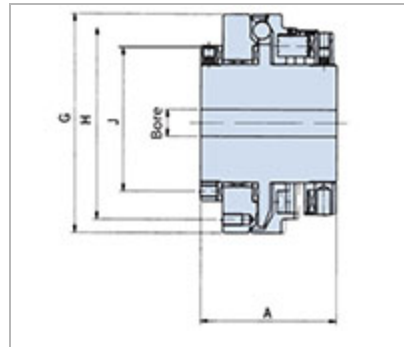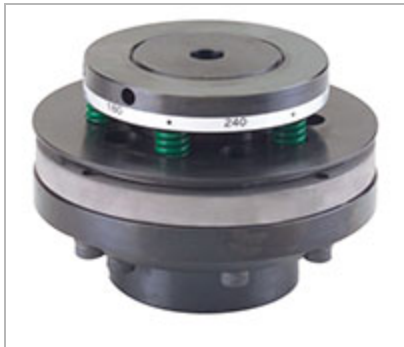

1

<u>Item #</u>	<u>Torque [Min]</u>	<u>Torque [Max]</u>	<u>Speed [Max]</u>	<u>Bore Size [Max]</u>	<u>A</u>	<u>G</u>	<u>Quantity</u>
<u>TGX10-L</u>	1.2 lb•ft 1.7 N•m	4.7 lb•ft 6.4 N•m	1400 rpm	0.590 in 15.00 mm	2.090 in 53.00 mm	2.441 in 62.00 mm	1

<u>Item #</u>	<u>Torque</u> <u>[Min]</u>	<u>Torque</u> <u>[Max]</u>	<u>Speed</u> <u>[Max]</u>	<u>Bore</u> <u>Size</u> <u>[Max]</u>	<u>A</u>	<u>G</u>	<u>Quantity</u>
<u>TGX10-M</u>	4.0 lb•ft 5.4 N•m	10.9 lb•ft 15.0 N•m	1400 rpm	0.590 in 15.00 mm	2.090 in 53.00 mm	2.441 in 62.00 mm	1
<u>TGX10-H</u>	8.0 lb•ft 11.0 N•m	21.7 lb•ft 29.0 N•m	1400 rpm	0.590 in 15.00 mm	2.090 in 53.00 mm	2.441 in 62.00 mm	1
<u>TGX20-L</u>	4.8 lb•ft 6.5 N•m	17.4 lb•ft 24.0 N•m	1100 rpm	0.980 in 25.00 mm	2.520 in 64.00 mm	3.386 in 86.00 mm	1
<u>TGX20-M</u>	9.6 lb•ft 13.0 N•m	25.1 lb•ft 34.0 N•m	1100 rpm	0.980 in 25.00 mm	2.520 in 64.00 mm	3.386 in 86.00 mm	1
<u>TGX20-H</u>	18.8 lb•ft 25.0 N•m	50.0 lb•ft 68.0 N•m	1100 rpm	0.980 in 25.00 mm	2.520 in 64.00 mm	3.386 in 86.00 mm	1
<u>TGX35-L</u>	17.0 lb•ft 23.0 N•m	50.0 lb•ft 68.0 N•m	800 rpm	1.380 in 35.00 mm	2.680 in 68.00 mm	4.213 in 107.00 mm	1

<u>Item #</u>	<u>Torque</u> <u>[Min]</u>	<u>Torque</u> <u>[Max]</u>	<u>Speed</u> <u>[Max]</u>	<u>Bore</u> <u>Size</u> <u>[Max]</u>	<u>A</u>	<u>G</u>	<u>Quantity</u>
<u>TGX35-M</u>	32.0 lb•ft 43.0 N•m	72.0 lb•ft 98.0 N•m	800 rpm	1.380 in 35.00 mm	2.680 in 68.00 mm	4.213 in 107.00 mm	1
<u>TGX35-H</u>	64.0 lb•ft 87.0 N•m	145.0 lb•ft 196.0 N•m	800 rpm	1.380 in 35.00 mm	2.680 in 68.00 mm	4.213 in 107.00 mm	1
<u>TGX50-L</u>	33.0 lb•ft 45.0 N•m	87.0 lb•ft 118.0 N•m	600 rpm	2.170 in 55.00 mm	3.620 in 92.00 mm	5.827 in 148.00 mm	1
<u>TGX50-M</u>	66.0 lb•ft 90.0 N•m	145.0 lb•ft 196.0 N•m	600 rpm	2.170 in 55.00 mm	3.620 in 92.00 mm	5.827 in 148.00 mm	1
<u>TGX50-H</u>	130.0 lb•ft 176.0 N•m	289.0 lb•ft 392.0 N•m	600 rpm	2.170 in 55.00 mm	3.620 in 92.00 mm	5.827 in 148.00 mm	1
<u>TGX70-L</u>	94.0 lb•ft 127.0 N•m	268.0 lb•ft 363.0 N•m	480 rpm	2.760 in 70.00 mm	3.860 in 98.00 mm	7.283 in 185.00 mm	1

<u>Item #</u>	<u>Torque</u> <u>[Min]</u>	<u>Torque</u> <u>[Max]</u>	<u>Speed</u> <u>[Max]</u>	<u>Bore</u> <u>Size</u> <u>[Max]</u>	<u>A</u>	<u>G</u>	<u>Quantity</u>
<u>TGX70-M</u>	195.0 lb•ft 265.0 N•m	376.0 lb•ft 510.0 N•m	480 rpm	2.760 in 70.00 mm	3.860 in 98.00 mm	7.283 in 185.00 mm	1
<u>TGX70-H</u>	289.0 lb•ft 392.0 N•m	578.0 lb•ft 784.0 N•m	480 rpm	2.760 in 70.00 mm	3.860 in 98.00 mm	7.283 in 185.00 mm	1