

U.S. Tsubaki Power Transmission, LLC
 U.S. Tsubaki Holdings, Inc.
 Corporate Headquarters
 301 E. Marquardt Dr.
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790
 Phone: 847.459.9500
 Fax: 847.459.9515
 Email: sales@ustsubaki.com
 Website: www.ustsubaki.com


TK095 CABLEVEYOR

Construction and Features

Pitch 3.740 in

TK Cableveyor is constructed of steel chain with aluminum supporters to give high strength and durability for diverse applications. The holes of the

[+ more](#)

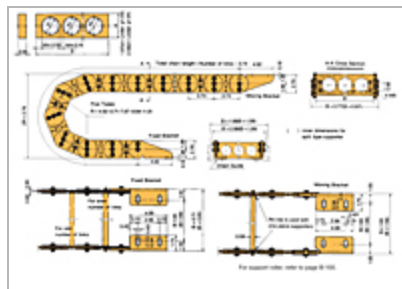

1 2 3 4

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantit</u>
---------------	--------------	---------------------------	--	----------------------	----------------------	----------------------	----------------

TK095-

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantit</u>
<u>4.92- 1.22- 3.15</u>	3.740 in	4.920 in	1.220 in	1.970 in	3.150 in	0.590 in	1
<u>TK095- 4.92- 1.22- 3.94</u>	3.740 in	4.920 in	1.220 in	1.970 in	3.940 in	0.590 in	1
<u>TK095- 4.92- 1.22- 4.92</u>	3.740 in	4.920 in	1.220 in	1.970 in	4.920 in	0.590 in	1
<u>TK095- 4.92- 1.22- 5.91</u>	3.740 in	4.920 in	1.220 in	1.970 in	5.910 in	0.590 in	1
<u>TK095- 4.92- 1.22- 7.87</u>	3.740 in	4.920 in	1.220 in	1.970 in	7.870 in	0.590 in	1
<u>TK095- 4.92- 1.22- 9.84</u>	3.740 in	4.920 in	1.220 in	1.970 in	9.840 in	0.590 in	1
<u>TK095-</u>							

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantit</u>
<u>4.92- 1.22- 11.81</u>	3.740 in	4.920 in	1.220 in	1.970 in	11.810 in	0.590 in	1
<u>TK095- 4.92- 1.22- 13.78</u>	3.740 in	4.920 in	1.220 in	1.970 in	13.780 in	0.590 in	1
<u>TK095- 4.92- 1.22- 15.75</u>	3.740 in	4.920 in	1.220 in	1.970 in	15.750 in	0.590 in	1
<u>TK095- 4.92- 1.81- 3.94</u>	3.740 in	4.920 in	1.810 in	2.560 in	3.940 in	0.590 in	1
<u>TK095- 4.92- 1.81- 4.92</u>	3.740 in	4.920 in	1.810 in	2.560 in	4.920 in	0.590 in	1
<u>TK095- 4.92- 1.81- 5.91</u>	3.740 in	4.920 in	1.810 in	2.560 in	5.910 in	0.590 in	1
<u>TK095-</u>							

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantit</u>
<u>4.92- 1.81- 7.87</u>	3.740 in	4.920 in	1.810 in	2.560 in	7.870 in	0.590 in	1
<u>TK095- 4.92- 1.81- 9.84</u>	3.740 in	4.920 in	1.810 in	2.560 in	9.840 in	0.590 in	1
<u>TK095- 4.92- 1.81- 11.81</u>	3.740 in	4.920 in	1.810 in	2.560 in	11.810 in	0.590 in	1
<u>TK095- 4.92- 1.81- 13.78</u>	3.740 in	4.920 in	1.810 in	2.560 in	13.780 in	0.590 in	1
<u>TK095- 4.92- 1.81- 15.75</u>	3.740 in	4.920 in	1.810 in	2.560 in	15.750 in	0.590 in	1
<u>TK095- 4.92- 1.81- 17.72</u>	3.740 in	4.920 in	1.810 in	2.560 in	17.720 in	0.590 in	1
<u>TK095-</u>							

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantit</u>
<u>4.92- 1.81- 19.67</u>	3.740 in	4.920 in	1.810 in	2.560 in	19.670 in	0.590 in	1
<u>TK095- 5.71- 1.22- 3.15</u>	3.740 in	5.710 in	1.220 in	1.970 in	3.150 in	0.590 in	1
<u>TK095- 5.71- 1.22- 3.94</u>	3.740 in	5.710 in	1.220 in	1.970 in	3.940 in	0.590 in	1
<u>TK095- 5.71- 1.22- 4.92</u>	3.740 in	5.710 in	1.220 in	1.970 in	4.920 in	0.590 in	1
<u>TK095- 5.71- 1.22- 5.91</u>	3.740 in	5.710 in	1.220 in	1.970 in	5.910 in	0.590 in	1
<u>TK095- 5.71- 1.22- 7.87</u>	3.740 in	5.710 in	1.220 in	1.970 in	7.870 in	0.590 in	1
<u>TK095-</u>							

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantit</u>
<u>5.71- 1.22- 9.84</u>	3.740 in	5.710 in	1.220 in	1.970 in	9.840 in	0.590 in	1

1 2 3 4