

U.S. Tsubaki Power Transmission, LLC
 U.S. Tsubaki Holdings, Inc.
 Corporate Headquarters
 301 E. Marquardt Dr.
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: sales@ustsubaki.com

Website: www.ustsubaki.com


TK130 CABLEVEYOR

Construction and Features

Pitch 5.120 in

TK Cableveyor is constructed of steel chain with aluminum supporters to give high strength and durability for diverse applications. The holes of the

[+ more](#)

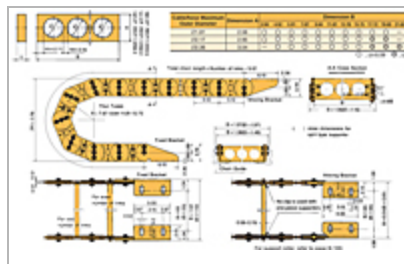

1 2 3 4 5

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantity</u>
---------------	--------------	---------------------------	--	----------------------	----------------------	----------------------	-----------------

TK130-

<u>7.87-</u>	5.120 in	7.870 in	3.940 in	2.560 in	3.940 in	0.590 in	1
<u>1.81-</u>							

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantity</u>
---------------	--------------	-----------------------------------	--	--------------------------	--------------------------	--------------------------	-----------------

3.94

TK130-

7.87-
1.81-
4.925.120
in

7.870 in

4.920 in

2.560 in

4.920 in

0.590 in

1

TK130-

7.87-
1.81-
5.915.120
in

7.870 in

5.910 in

2.560 in

5.910 in

0.590 in

1

TK130-

7.87-
1.81-
7.875.120
in

7.870 in

7.870 in

2.560 in

7.870 in

0.590 in

1

TK130-

7.87-
1.81-
9.845.120
in

7.870 in

9.840 in

2.560 in

9.840 in

0.590 in

1

TK130-

7.87-
1.81-
11.815.120
in

7.870 in

11.810 in

2.560 in

11.810 in

0.590 in

1

TK130-

7.87-
1.81-
13.785.120
in

7.870 in

13.780 in

2.560 in

13.780 in

0.590 in

1

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantity</u>
---------------	--------------	-----------------------------------	--	--------------------------	--------------------------	--------------------------	-----------------

<u>TK130- 7.87- 1.81- 15.75</u>	5.120 in	7.870 in	15.750 in	2.560 in	15.750 in	0.590 in	1
---	-------------	----------	-----------	----------	-----------	----------	---

<u>TK130- 7.87- 1.81- 17.72</u>	5.120 in	7.870 in	17.720 in	2.560 in	17.720 in	0.590 in	1
---	-------------	----------	-----------	----------	-----------	----------	---

<u>TK130- 7.87- 1.81- 19.69</u>	5.120 in	7.870 in	19.690 in	2.560 in	19.690 in	0.590 in	1
---	-------------	----------	-----------	----------	-----------	----------	---

<u>TK130- 7.87- 2.17- 3.94</u>	5.120 in	7.870 in	3.940 in	2.950 in	3.940 in	0.590 in	1
--	-------------	----------	----------	----------	----------	----------	---

<u>TK130- 7.87- 2.17- 4.92</u>	5.120 in	7.870 in	4.920 in	2.950 in	4.920 in	0.590 in	1
--	-------------	----------	----------	----------	----------	----------	---

<u>TK130- 7.87- 2.17- 5.91</u>	5.120 in	7.870 in	5.910 in	2.950 in	5.910 in	0.590 in	1
--	-------------	----------	----------	----------	----------	----------	---

TK130-

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantity</u>
<u>7.87- 2.17- 7.87</u>	5.120 in	7.870 in	7.870 in	2.950 in	7.870 in	0.590 in	1
<u>TK130- 7.87- 2.17- 9.84</u>	5.120 in	7.870 in	9.840 in	2.950 in	9.840 in	0.590 in	1
<u>TK130- 7.87- 2.17- 11.81</u>	5.120 in	7.870 in	11.810 in	2.950 in	11.810 in	0.590 in	1
<u>TK130- 7.87- 2.17- 13.78</u>	5.120 in	7.870 in	13.780 in	2.950 in	13.780 in	0.590 in	1
<u>TK130- 7.87- 2.17- 15.75</u>	5.120 in	7.870 in	15.750 in	2.950 in	15.750 in	0.590 in	1
<u>TK130- 7.87- 2.17- 17.72</u>	5.120 in	7.870 in	17.720 in	2.950 in	17.720 in	0.780 in	1
<u>TK130-</u>							

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantity</u>
<u>7.87- 2.17- 19.69</u>	5.120 in	7.870 in	19.690 in	2.950 in	19.690 in	0.780 in	1
<u>TK130- 7.87- 2.36- 4.92</u>	5.120 in	7.870 in	4.920 in	3.540 in	4.920 in	0.590 in	1
<u>TK130- 7.87- 2.36- 5.91</u>	5.120 in	7.870 in	5.910 in	3.540 in	5.910 in	0.590 in	1
<u>TK130- 7.87- 2.36- 7.87</u>	5.120 in	7.870 in	7.870 in	3.540 in	7.870 in	0.590 in	1
<u>TK130- 7.87- 2.36- 9.84</u>	5.120 in	7.870 in	9.840 in	3.540 in	9.840 in	0.590 in	1
<u>TK130- 7.87- 2.36- 11.81</u>	5.120 in	7.870 in	11.810 in	3.540 in	11.810 in	0.590 in	1