

U.S. Tsubaki Power Transmission, LLC
 U.S. Tsubaki Holdings, Inc.
 Corporate Headquarters
 301 E. Marquardt Dr.
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790
 Phone: 847.459.9500
 Fax: 847.459.9515
 Email: sales@ustsubaki.com
 Website: www.ustsubaki.com


TK180 CABLEVEYOR

Construction and Features

Pitch 7.090 in

TK Cableveyor is constructed of steel chain with aluminum supporters to give high strength and durability for diverse applications. The holes of the

[+ more](#)

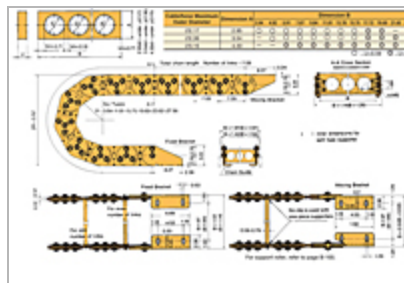

1 2 3 4 5 »

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantity</u>
---------------	--------------	---------------------------	------------------------------------------	----------------------	----------------------	----------------------	-----------------

TK180-

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantit</u>
<u>9.84- 2.17- 3.94</u>	7.090 in	9.840 in	3.940 in	2.950 in	3.940 in	0.590 in	1
<u>TK180- 9.84- 2.17- 4.92</u>	7.090 in	9.840 in	4.920 in	2.950 in	4.920 in	0.590 in	1
<u>TK180- 9.84- 2.17- 5.91</u>	7.090 in	9.840 in	5.910 in	2.950 in	5.910 in	0.590 in	1
<u>TK180- 9.84- 2.17- 7.87</u>	7.090 in	9.840 in	7.870 in	2.950 in	7.870 in	0.590 in	1
<u>TK180- 9.84- 2.17- 9.84</u>	7.090 in	9.840 in	9.840 in	2.950 in	9.840 in	0.590 in	1
<u>TK180- 9.84- 2.17- 11.81</u>	7.090 in	9.840 in	11.810 in	2.950 in	11.810 in	0.590 in	1
<u>TK180-</u>							

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantit</u>
---------------	--------------	-----------------------------------	------------------------------------------------------	--------------------------	--------------------------	--------------------------	----------------

<u>9.84- 2.17- 13.78</u>	7.090 in	9.840 in	13.780 in	2.950 in	13.780 in	0.590 in	1
----------------------------------	-------------	----------	-----------	----------	-----------	----------	---

<u>TK180- 9.84- 2.17- 15.75</u>	7.090 in	9.840 in	15.750 in	2.950 in	15.750 in	0.590 in	1
---------------------------------------------	-------------	----------	-----------	----------	-----------	----------	---

<u>TK180- 9.84- 2.17- 17.72</u>	7.090 in	9.840 in	17.720 in	2.950 in	17.720 in	0.790 in	1
---------------------------------------------	-------------	----------	-----------	----------	-----------	----------	---

<u>TK180- 9.84- 2.17- 19.69</u>	7.090 in	9.840 in	19.690 in	2.950 in	19.690 in	0.790 in	1
---------------------------------------------	-------------	----------	-----------	----------	-----------	----------	---

<u>TK180- 9.84- 2.36- 4.92</u>	7.090 in	9.840 in	4.920 in	3.540 in	4.920 in	0.590 in	1
--------------------------------------------	-------------	----------	----------	----------	----------	----------	---

<u>TK180- 9.84- 2.36- 5.91</u>	7.090 in	9.840 in	5.910 in	3.540 in	5.910 in	0.590 in	1
--------------------------------------------	-------------	----------	----------	----------	----------	----------	---

<u>TK180-</u>							
---------------	--	--	--	--	--	--	--

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantit</u>
<u>9.84- 2.36- 7.87</u>	7.090 in	9.840 in	7.870 in	3.540 in	7.870 in	0.590 in	1
<u>TK180- 9.84- 2.36- 9.84</u>	7.090 in	9.840 in	9.840 in	3.540 in	9.840 in	0.590 in	1
<u>TK180- 9.84- 2.36- 11.81</u>	7.090 in	9.840 in	11.810 in	3.540 in	11.810 in	0.590 in	1
<u>TK180- 9.84- 2.36- 13.78</u>	7.090 in	9.840 in	13.780 in	3.540 in	13.780 in	0.590 in	1
<u>TK180- 9.84- 2.36- 15.75</u>	7.090 in	9.840 in	15.750 in	3.540 in	15.750 in	0.590 in	1
<u>TK180- 9.84- 2.36- 17.72</u>	7.090 in	9.840 in	17.720 in	3.540 in	17.720 in	0.790 in	1
<u>TK180-</u>							

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantit</u>
<u>9.84- 2.36- 19.69</u>	7.090 in	9.840 in	19.690 in	3.540 in	19.690 in	0.790 in	1
<u>TK180- 9.84- 2.36- 21.65</u>	7.090 in	9.840 in	21.650 in	3.540 in	21.650 in	0.790 in	1
<u>TK180- 9.84- 2.36- 23.62</u>	7.090 in	9.840 in	23.620 in	3.540 in	23.620 in	0.790 in	1
<u>TK180- 9.84- 3.15- 5.91</u>	7.090 in	9.840 in	5.910 in	4.330 in	5.910 in	0.790 in	1
<u>TK180- 9.84- 3.15- 7.87</u>	7.090 in	9.840 in	7.870 in	4.330 in	7.870 in	0.790 in	1
<u>TK180- 9.84- 3.15- 9.84</u>	7.090 in	9.840 in	9.840 in	4.330 in	9.840 in	0.790 in	1
<u>TK180-</u>							

<u>Item #</u>	<u>Pitch</u>	<u>R - Bending Radius</u>	<u>Cabel/Hose Maximum Outer Diameter</u>	<u>A - Dimension</u>	<u>B - Dimension</u>	<u>U - Dimension</u>	<u>Quantity</u>
<u>9.84-</u> <u>3.15-</u> <u>11.81</u>	7.090 in	9.840 in	11.810 in	4.330 in	11.810 in	0.790 in	1

1 2 3 4 5 »