

U.S. Tsubaki Power Transmission, LLC  
 U.S. Tsubaki Holdings, Inc.  
 Corporate Headquarters  
 301 E. Marquardt Dr.  
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500


Fax: 847.459.9515

Email: [sales@ustsubaki.com](mailto:sales@ustsubaki.com)

Website: [www.ustsubaki.com](http://www.ustsubaki.com)

## TL SERIES TL10 - TL700 TORQUE LIMITER

Traditional machine protection. Friction-type construction. Slip-torque setting is done by simply tightening the adjusting nut or bolts. Competitively priced and easy to use.

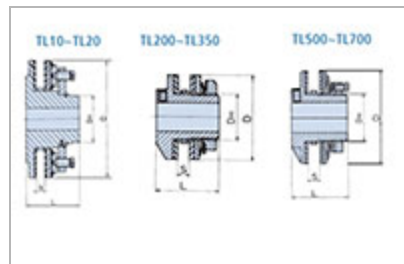

1

Item #	Torque [Min]	Torque [Max]	Speed [Max]	Bore Size [Max]	L	D	Quantity
<u>TL200-1L</u>	0.7 lb•ft 1.0 N•m	1.5 lb•ft 2.0 N•m	1800 rpm	0.550 in 14.00 mm	1.140 in 29.00 mm	2.000 in 50.00 mm	<input type="text" value="1"/>
<u>TL200-1</u>	2.2 lb•ft 2.9 N•m	7.2 lb•ft 9.8 N•m	1800 rpm	0.550 in 14.00 mm	1.140 in 29.00 mm	2.000 in 50.00 mm	<input type="text" value="1"/>

<u>Item #</u>	<u>Torque</u> <u>[Min]</u>	<u>Torque</u> <u>[Max]</u>	<u>Speed</u> <u>[Max]</u>	<u>Bore Size</u> <u>[Max]</u>	<u>L</u>	<u>D</u>	<u>Quantity</u>
<u>TL200-2</u>	5.0 lb•ft 6.9 N•m	15.0 lb•ft 20.0 N•m	1800 rpm	0.550 in 14.00 mm	1.140 in 29.00 mm	2.000 in 50.00 mm	1
<u>TL250-1L</u>	2.2 lb•ft 2.9 N•m	5.0 lb•ft 6.9 N•m	1800 rpm	0.880 in 22.00 mm	1.880 in 48.00 mm	2.500 in 65.00 mm	1
<u>TL250-1</u>	5.0 lb•ft 6.9 N•m	20.0 lb•ft 27.0 N•m	1800 rpm	0.880 in 22.00 mm	1.880 in 48.00 mm	2.500 in 65.00 mm	1
<u>TL250-2</u>	10.0 lb•ft 14.0 N•m	40.0 lb•ft 54.0 N•m	1800 rpm	0.880 in 22.00 mm	1.880 in 48.00 mm	2.500 in 65.00 mm	1
<u>TL350-1L</u>	7.0 lb•ft 9.8 N•m	15.0 lb•ft 20.0 N•m	1800 rpm	1 in 25.00 mm	2.440 in 62.00 mm	3.500 in 89.00 mm	1
<u>TL350-1</u>	15.0 lb•ft 20.0 N•m	55.0 lb•ft 74.0 N•m	1800 rpm	1 in 25.00 mm	2.440 in 62.00 mm	3.500 in 89.00 mm	1
<u>TL350-2</u>	25.0 lb•ft 34.0 N•m	110.0 lb•ft 149.0 N•m	1800 rpm	1 in 25.00 mm	2.440 in 62.00 mm	3.500 in 89.00 mm	1
<u>TL500-1L</u>	15.0 lb•ft 20.0 N•m	36.0 lb•ft 49.0 N•m	1800 rpm	1.650 in 42.00 mm	3.000 in 76.00 mm	5.000 in 127.00 mm	1

<u>Item #</u>	<u>Torque</u> <u>[Min]</u>	<u>Torque</u> <u>[Max]</u>	<u>Speed</u> <u>[Max]</u>	<u>Bore Size</u> <u>[Max]</u>	<u>L</u>	<u>D</u>	<u>Quantity</u>
<u>TL500-1</u>	35.0 lb•ft 47.0 N•m	155.0 lb•ft 210.0 N•m	1800 rpm	1.650 in 42.00 mm	3.000 in 76.00 mm	5.000 in 127.00 mm	1
<u>TL500-2</u>	65.0 lb•ft 88.0 N•m	310.0 lb•ft 420.0 N•m	1800 rpm	1.650 in 42.00 mm	3.000 in 76.00 mm	5.000 in 127.00 mm	1
<u>TL700-1L</u>	36.0 lb•ft 49.0 N•m	87.0 lb•ft 118.0 N•m	1800 rpm	2.520 in 64.00 mm	3.860 in 98.00 mm	7.000 in 178.00 mm	1
<u>TL700-1</u>	85.0 lb•ft 116.0 N•m	420.0 lb•ft 569.0 N•m	1800 rpm	2.520 in 64.00 mm	3.860 in 98.00 mm	7.000 in 178.00 mm	1
<u>TL700-2</u>	165.0 lb•ft 223.0 N•m	800.0 lb•ft 1080.0 N•m	1800 rpm	2.520 in 64.00 mm	3.860 in 98.00 mm	7.000 in 178.00 mm	1
<u>TL10-16</u>	289.0 lb•ft 392.0 N•m	940.0 lb•ft 1274.0 N•m	1000 rpm	2.840 in 72.00 mm	4.530 in 115.00 mm	10.000 in 254.00 mm	1
<u>TL10-24</u>	435.0 lb•ft 588.0 N•m	1370.0 lb•ft 1862.0 N•m	1000 rpm	2.840 in 72.00 mm	4.530 in 115.00 mm	10.000 in 254.00 mm	1

<u>Item #</u>	<u>Torque</u> <u>[Min]</u>	<u>Torque</u> <u>[Max]</u>	<u>Speed</u> <u>[Max]</u>	<u>Bore Size</u> <u>[Max]</u>	<u>L</u>	<u>D</u>	<u>Quantity</u>
<u>TL14-10</u>	651.0 lb•ft 882.0 N•m	1960.0 lb•ft 2666.0 N•m	500 rpm	3.940 in 100.00 mm	5.910 in 150.00 mm	14.000 in 356.00 mm	1
<u>TL14-15</u>	1446.0 lb•ft 1960.0 N•m	2890.0 lb•ft 3920.0 N•m	500 rpm	3.940 in 100.00 mm	5.910 in 150.00 mm	14.000 in 356.00 mm	1
<u>TL20-6</u>	1807.0 lb•ft 2450.0 N•m	3615.0 lb•ft 4900.0 N•m	500 rpm	5.120 in 130.00 mm	6.890 in 175.00 mm	20.000 in 508.00 mm	1
<u>TL20-12</u>	3400.0 lb•ft 4606.0 N•m	6870.0 lb•ft 9310.0 N•m	500 rpm	5.120 in 130.00 mm	6.890 in 175.00 mm	20.000 in 508.00 mm	1