

U.S. Tsubaki Power Transmission, LLC  
 U.S. Tsubaki Holdings, Inc.  
 Corporate Headquarters  
 301 E. Marquardt Dr.  
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515

Email: [sales@ustsubaki.com](mailto:sales@ustsubaki.com)


Website: [www.ustsubaki.com](http://www.ustsubaki.com)

## WELDED STEEL - MILL CHAINS

### MILL TYPE SERIES

- Designed for heavy duty conveyor service.
- Full Round Press Fit Pins for better fatigue resistance and strength.
- High Quality Pitch Holes.
- Readily handles shock loads and abrasive

[+ more](#)

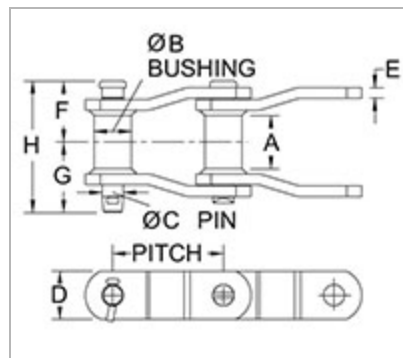

<u>Chain Number</u>	<u>Pitch</u>	<u>Sidebar Style</u>	<u>Inside Width - A</u>	<u>Bushing Diameter - B</u>	<u>Pin Diameter - C</u>	<u>Sidebar Height - D</u>	<u>Sidebar Thickness - E</u>	<u>Pin Head to CL - F</u>
<u>WHX-78</u>	2.609 in	Offset	1.19 in	0.88 in	0.50 in	1.12 in	0.25 in	1.44 in
<u>WHX-82</u>	3.075 in	Offset	1.44 in	1.06 in	0.56 in	1.25 in	0.25 in	1.56 in
<u>WHX-124</u>	4.000 in	Offset	1.62 in	1.25 in	0.75 in	1.50 in	0.38 in	1.94 in
<u>WHX-124H</u>	4.063 in	Offset	1.62 in	1.75 in	1.00 in	2.00 in	0.50 in	2.28 in
<u>WHX-111</u>	4.760 in	Offset	2.25 in	1.38 in	0.75 in	1.50 in	0.38 in	2.25 in
<u>WHX-106</u>	6.000 in	Offset	1.63 in	1.25 in	0.75 in	1.50 in	0.38 in	1.94 in
<u>WHX-132</u>	6.050 in	Offset	2.75 in	1.75 in	1.00 in	2.00 in	0.50 in	2.97 in
<u>WHX-150</u>	6.050 in	Offset	2.88 in	1.75 in	1.00 in	2.50 in	0.50 in	2.97 in
<u>WHX-155</u>	6.050 in	Offset	2.75 in	1.75 in	1.12 in	2.50 in	0.62 in	3.22 in
<u>WHX-159</u>	6.125 in	Offset	2.88 in	2.00 in	1.25 in	3.00 in	0.62 in	3.22 in

<u>Chain Number</u>	<u>Pitch</u>	<u>Sidebar Style</u>	<u>Inside Width - A</u>	<u>Bushing Diameter - B</u>	<u>Pin Diameter - C</u>	<u>Sidebar Height - D</u>	<u>Sidebar Thickness - E</u>	<u>Pin Head to CL - F</u>
---------------------	--------------	----------------------	-------------------------	-----------------------------	-------------------------	---------------------------	------------------------------	---------------------------

<u>WHX-2855</u>	6.050 in	Offset	2.75 in	1.75 in	1.25 in	2.50 in	0.62 in	3.22 in
-----------------	----------	--------	---------	---------	---------	---------	---------	---------

<u>WHX-3855</u>	6.050 in	Offset	2.75 in	1.75 in	1.25 in	3.00 in	0.62 in	3.22 in
-----------------	----------	--------	---------	---------	---------	---------	---------	---------

<u>WHX-4855</u>	12.000 in	Offset	2.75 in	1.75 in	1.25 in	2.50 in	0.62 in	3.22 in
-----------------	-----------	--------	---------	---------	---------	---------	---------	---------