

U.S. Tsubaki Power Transmission, LLC  
 U.S. Tsubaki Holdings, Inc.  
 Corporate Headquarters  
 301 E. Marquardt Dr.  
 Wheeling, IL 60090 USA

Toll Free: 800.323.7790

Phone: 847.459.9500

Fax: 847.459.9515


Email: [sales@ustsubaki.com](mailto:sales@ustsubaki.com)

Website: [www.ustsubaki.com](http://www.ustsubaki.com)

## PBUS SERIES CAM CLUTCH

PBUS Series Cam Clutch is intended for use in general overrunning or indexing applications. The PBUS Series comes pre-lubricated with synthetic grease for easy installation and long service life. The

[+ more](#)

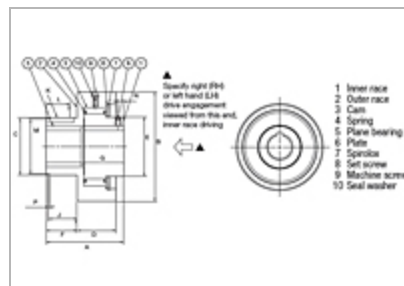

1 2

<u>Item #</u>	<u>Bore Size</u>	<u>Torque Capacity</u>	<u>Max. Overrunning Inner Race</u>	<u>Max. Overrunning Outer Race</u>	<u>Drag Torque</u>	<u>Rotation</u>	<u>Quantity</u>
---------------	------------------	------------------------	------------------------------------	------------------------------------	--------------------	-----------------	-----------------

<u>Item #</u>	<u>Bore Size</u>	<u>Torque Capacity</u>	<u>Max. Overrunning Inner Race</u>	<u>Max. Overrunning Outer Race</u>	<u>Drag Torque</u>	<u>Rotation</u>	<u>Quantity</u>
<u>PBUS3-F-RH</u>	0.375 in	21.7 lb•ft 29.4 N•m	1800 rpm	900 rpm	0.148 lb•ft 0.20 N•m	Right hand rotation	1
<u>PBUS3-10-RH</u>	0.394 in	21.7 lb•ft 29.4 N•m	1800 rpm	900 rpm	0.148 lb•ft 0.20 N•m	Right hand rotation	1
<u>PBUS3-H-RH</u>	0.500 in	21.7 lb•ft 29.4 N•m	1800 rpm	900 rpm	0.148 lb•ft 0.20 N•m	Right hand rotation	1
<u>PBUS5-H-RH</u>	0.500 in	108.4 lb•ft 147.0 N•m	1800 rpm	900 rpm	0.148 lb•ft 0.20 N•m	Right hand rotation	1
<u>PBUS5-J-RH</u>	0.625 in	108.4 lb•ft 147.0 N•m	1800 rpm	900 rpm	0.148 lb•ft 0.20 N•m	Right hand rotation	1
<u>PBUS5-16-RH</u>	0.630 in	108.4 lb•ft 147.0 N•m	1800 rpm	900 rpm	0.148 lb•ft 0.20 N•m	Right hand rotation	1

<u>Item #</u>	<u>Bore Size</u>	<u>Torque Capacity</u>	<u>Max. Overrunning Inner Race</u>	<u>Max. Overrunning Outer Race</u>	<u>Drag Torque</u>	<u>Rotation</u>	<u>Quantity</u>
<u>PBUS6-L-RH</u>	0.750 in	281.7 lb·ft 382.0 N·m	1500 rpm	800 rpm	0.148 lb·ft 0.20 N·m	Right hand rotation	1
<u>PBUS6-20-RH</u>	0.787 in	281.7 lb·ft 382.0 N·m	1500 rpm	800 rpm	0.148 lb·ft 0.20 N·m	Right hand rotation	1
<u>PBUS8-P-RH</u>	1.000 in	418.9 lb·ft 568.0 N·m	1200 rpm	650 rpm	0.214 lb·ft 0.29 N·m	Right hand rotation	1
<u>PBUS8-25-RH</u>	1.000 in	418.9 lb·ft 568.0 N·m	1200 rpm	650 rpm	0.214 lb·ft 0.29 N·m	Right hand rotation	1
<u>PBUS8-1-RH</u>	1.000 in	418.9 lb·ft 568.0 N·m	1200 rpm	650 rpm	0.214 lb·ft 0.29 N·m	Right hand rotation	1
<u>PBUS10-1B-RH</u>	1.125 in	621.8 lb·ft 843.0 N·m	1000 rpm	400 rpm	0.288 lb·ft 0.39 N·m	Right hand rotation	1

<u>Item #</u>	<u>Bore Size</u>	<u>Torque Capacity</u>	<u>Max. Overrunning Inner Race</u>	<u>Max. Overrunning Outer Race</u>	<u>Drag Torque</u>	<u>Rotation</u>	<u>Quantity</u>
<u>PBUS10-30-RH</u>	1.181 in	621.8 lb·ft 843.0 N·m	1000 rpm	400 rpm	0.288 lb·ft 0.39 N·m	Right hand rotation	1
<u>PBUS10-1D-RH</u>	1.250 in	621.8 lb·ft 843.0 N·m	1000 rpm	400 rpm	0.288 lb·ft 0.39 N·m	Right hand rotation	1
<u>PBUS12-1F-RH</u>	1.375 in	1128.5 lb·ft 1530.0 N·m	800 rpm	300 rpm	0.288 lb·ft 0.39 N·m	Right hand rotation	1
<u>PBUS12-1H-RH</u>	1.500 in	1128.5 lb·ft 1530.0 N·m	800 rpm	300 rpm	0.288 lb·ft 0.39 N·m	Right hand rotation	1
<u>PBUS12-40-RH</u>	1.575 in	1128.5 lb·ft 1530.0 N·m	800 rpm	300 rpm	0.288 lb·ft 0.39 N·m	Right hand rotation	1
<u>PBUS14-1J-RH</u>	1.625 in	1556.3 lb·ft 2110.0 N·m	700 rpm	300 rpm	0.435 lb·ft 0.59 N·m	Right hand rotation	1

<u>Item #</u>	<u>Bore Size</u>	<u>Torque Capacity</u>	<u>Max. Overrunning Inner Race</u>	<u>Max. Overrunning Outer Race</u>	<u>Drag Torque</u>	<u>Rotation</u>	<u>Quantity</u>
<u>PBUS14-1L-RH</u>	1.750 in	1556.3 lb•ft 2110.0 N•m	700 rpm	300 rpm	0.435 lb•ft 0.59 N•m	Right hand rotation	1
<u>PBUS14-45-RH</u>	1.772 in	1556.3 lb•ft 2110.0 N•m	700 rpm	300 rpm	0.435 lb•ft 0.59 N•m	Right hand rotation	1
<u>PBUS3-F-LH</u>	0.375 in	21.7 lb•ft 29.4 N•m	1800 rpm	900 rpm	0.148 lb•ft 0.20 N•m	Left hand rotation	1
<u>PBUS3-10-LH</u>	0.394 in	21.7 lb•ft 29.4 N•m	1800 rpm	900 rpm	0.148 lb•ft 0.20 N•m	Left hand rotation	1
<u>PBUS3-H-LH</u>	0.500 in	21.7 lb•ft 29.4 N•m	1800 rpm	900 rpm	0.148 lb•ft 0.20 N•m	Left hand rotation	1
<u>PBUS5-H-LH</u>	0.500 in	108.4 lb•ft 147.0 N•m	1800 rpm	900 rpm	0.148 lb•ft 0.20 N•m	Left hand rotation	1

<u>Item #</u>	<u>Bore Size</u>	<u>Torque Capacity</u>	<u>Max. Overrunning Inner Race</u>	<u>Max. Overrunning Outer Race</u>	<u>Drag Torque</u>	<u>Rotation</u>	<u>Quantity</u>
PBUS5- J-LH	0.625 in	108.4 lb·ft 147.0 N·m	1800 rpm	900 rpm	0.148 lb·ft 0.20 N·m	Left hand rotation	1